





INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E21B 43/30, 43/01, 43/14, 19/14, 43/38, 43/40, 17/00, 17/18, 36/00, 33/035, 33/037	A2	(11) International Publication Number: WO 98/15712 (43) International Publication Date: 16 April 1998 (16.04.98)
(21) International Application Number: PCT/US97/18517 (22) International Filing Date: 8 October 1997 (08.10.97) (30) Priority Data: 60/031,444 8 October 1996 (08.10.96) US (71) Applicant: BAKER HUGHES INCORPORATED [US/US]; Suite 1200, 3900 Essex Lane, Houston, TX 77027 (US). (72) Inventors: DONOVAN, Joseph, F.; 22914 Briarhorn Drive, Spring, TX 77389 (US). JOHNSON, Michael, H.; 3600 Arbor Creek Lane, Flower Mound, TX 75028 (US). HER- BERT, Roger, P.; 8603 Tranquil Park, Spring, TX 77379 (US). GANN, Christopher, L.; 25 West Wedgewood Glen, The Woodlands, TX 77381 (US). (74) Agents: ROWOLD, Carl, A. et al.; Baker Hughes Incorporated, Suite 1200, 3900 Essex Lane, Houston, TX 77027 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>

(54) Title: A METHOD OF FORMING AND SERVICING WELLBORES FROM A MAIN WELLBORE**(57) Abstract**

The present invention provides methods for forming multiple wellbores from a single location. A relatively large diameter main wellbore (10) is drilled to a known depth. A plurality of spaced apart wellbores (20a-20n) are formed from the bottom of the main wellbore, wherein at least one such wellbore is a production wellbore for producing hydrocarbons from subsurface formations. Wellhead (22a-22n) equipment for each production wellbore is installed at main wellbore bottom. Additional devices or equipment (30, 80) are also placed in the main wellbore, preferably near the bottom. Such equipment may include a fluid processing apparatus, chemical injection equipment for injecting chemicals or

additives into the wellbores, compressors for injecting compressed gas into one or more of the production wellbores or for transporting a gas to the surface, robotics devices (80) for placing and/or removing devices or materials from the wellbores, a control unit for monitoring and controlling apparatus and devices in the main wellbore and the production wellbore, and any other desired equipment for performing a useful function relating any of the wellbores. A secondary access wellbore may be formed from the main wellbore or the surface for storing apparatus that is used to monitor and/or control the operation of devices in the production wellbores during the various stages in the life of such wellbores. Some of the equipment deployed in the main wellbore is prefabricated and may be retrieved. Selective redundant equipment is provided to allow uninterrupted production from the various wellbores.

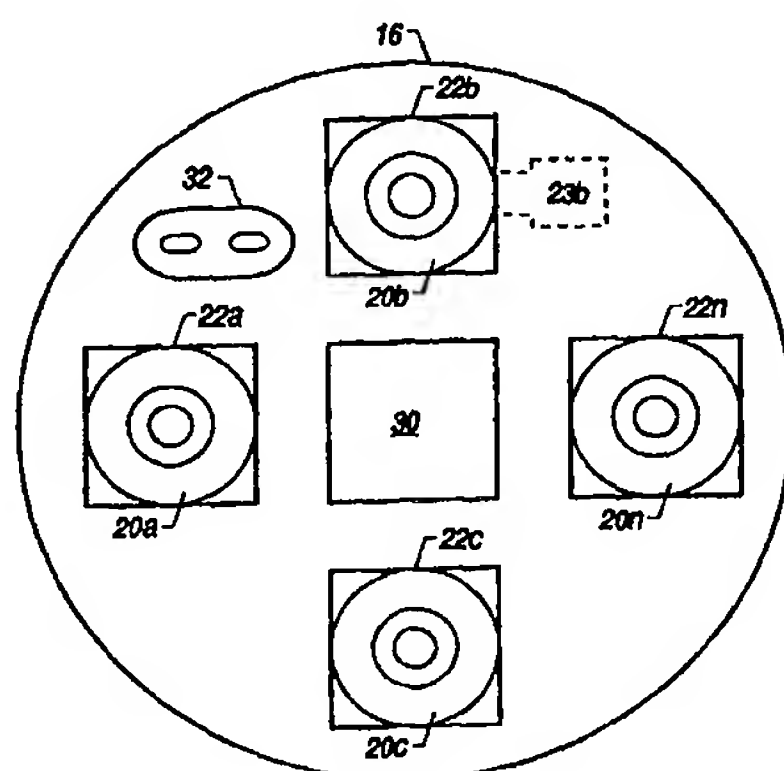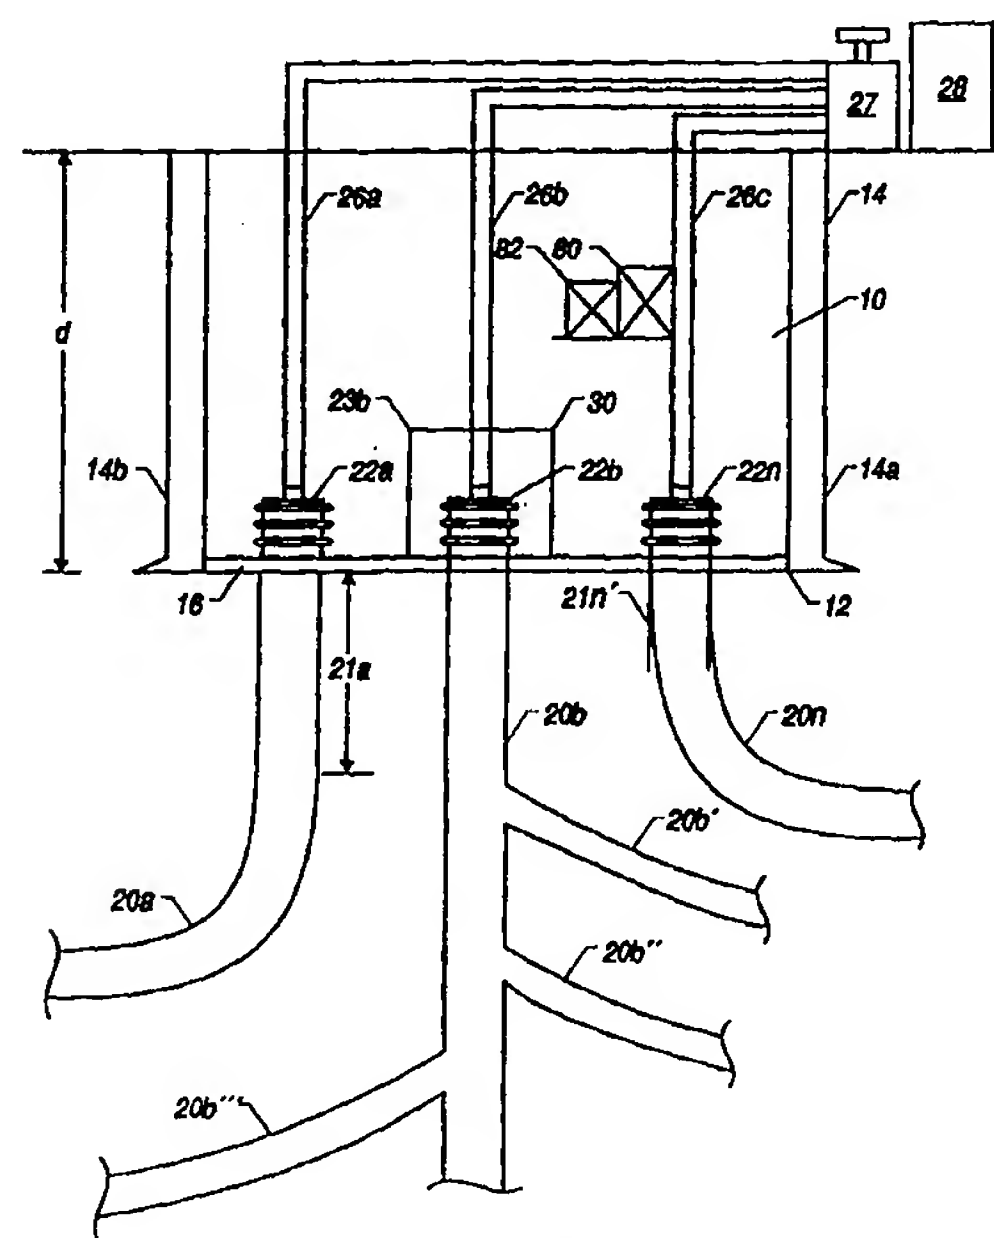**B****A**

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**TITLE: A METHOD OF FORMING AND SERVICING
WELLBORES FROM A MAIN WELLBORE**

BACKGROUND OF THE INVENTION

5

1. Field of the Invention

This invention relates generally to wellbore construction and more particularly to the construction of one or more wellbores from a large diameter
10 wellbore that can act as a subsurface platform for drilling multiple wellbores and provide space for housing a variety of equipment that can be utilized to perform a host of functions or operations during the drilling, completion and production phases of such wellbores.

15 **2. Background of the Art**

To obtain hydrocarbons such as oil and gas, wellbores or boreholes are drilled from one or more surface locations into hydrocarbon-bearing subterranean geological strata or formations (also referred to in the industry as
20 reservoirs). A large proportion of the current drilling activity involves drilling deviated and/or substantially horizontal wellbores extending through such reservoirs. To develop an oil and gas field, especially offshore, multiple wellbores are drilled from an offshore rig or platform stationed at a fixed location. A template is placed on the sea bed, which template defines the location and

size of each of the multiple wellbores to be drilled. The various wellbores are then drilled from the template along their respective pre-determined wellpaths (or drilling course) to their respective depths. Frequently, ten to twenty offshore wellbores are drilled from an offshore rig stationed at a single location. In some
5 regions, such as the North Sea, as many as sixty separate wellbores have been drilled from an offshore platform stationed at a single location. The initial drilling direction of several thousand feet of each such wellbore is generally vertical and typically lies in a non-producing (non-hydrocarbon bearing) formation.

Each wellbore is then completed to produce hydrocarbons from its
10 associated subsurface formations. Completion of a wellbore typically includes placing casings through the entire length of the wellbore, perforating production zones and installing safety devices, flow control devices, zone isolation devices and other devices within the wellbore. Additionally, each wellbore has associated wellhead equipment, generally referred to as a "tree" and includes a
15 blow-out-preventor, a riser or stuffing box and other safety and fluid flow control devices.

The above-described wellbore construction requires drilling each such wellbore from the surface to its respective depth and then completing each such wellbore to its entire depth. Typically, the first several thousand feet of each
20 such wellbore lie in non-hydrocarbon-producing formations. As an example, assume that there are ten wellbores drilled from an offshore platform, each having a nine-inch internal diameter. Further assume that there is no production zone for the initial five thousand feet for any of these wellbores. In this example, there would be a total fifty thousand feet (five thousand for each of the ten (10)

wellbores) of non-producing wellbore that must be drilled and completed, serving little useful purpose. It is, therefore, desirable to drill as few upper portions as necessary from a single location or site, especially as the cost of drilling and completing offshore wellbores can exceed several tens of thousand dollars per
5 each thousand feet of wellbore.

The production wellbores are relatively small in diameter and typically contain flow tubings and a variety of devices, leaving little or no space for installing other equipment, such as fluid processing equipment to separate oil, gas and water, compressors for transporting gas and fluids uphole, chemical
10 injection equipment for treating fluids downhole, etc. Therefore, the above-described equipment and wellhead equipment that includes safety devices such as blow-out-preventor stacks, are usually installed on the earth's surface. Oil, gas and water separators are typically installed adjacent to the wellheads.

During the production phase, fluids from each of the production wellbores
15 are passed to the separator, which separates the constituents, which are then transported to their desired destinations.

The above-described equipment, whether installed on the earth's surface or on the sea bed, poses environmental risks and is susceptible to theft and damage. The cost to the wellbore operators can be significant if the equipment is
20 damaged or if a blow-out occurs. It is therefore desirable to install much of the above-described equipment and power sources below the earth's surface. The wellbore construction methods of the present invention allow installing a variety of equipment below the earth's surface.

An important aspect of drilling a deviated or horizontal wellbore is to drill it along a predetermined wellpath or drilling course. During drilling of the wellbore, it is important to accurately determine the true location of the drill bit relative to a reference point so as to continuously orient or maintain the drill bit along the
5 desired wellpath. This would require substantially continuously transmitting data relating to the drill bit location to the surface. However, the current drill strings usually include a large number of sensors to provide information about the drill bit location, formation parameters, borehole parameters and the tool condition and a relatively low data transmission telemetry, such as the mud-pulse
10 telemetry. In such systems, the drill bit location data is transmitted to the surface periodically. The drill bit sometimes significantly veers off course, requiring larger adjustments to maintain the drilling course, which can be very time consuming. The present invention provides a method for continuously determining the drill bit location which allows the driller to drill the wellbore along
15 the predetermined wellpath.

During the completion of a wellbore, a number of devices are utilized in the wellbore to perform specific functions or operations. Such devices may include, packers, sliding sleeves, perforating guns, fluid flow control devices, and a number of sensors. To efficiently produce hydrocarbons from wellbores drilled
20 from a single location or from multi-lateral wellbores, various remotely-actuated devices can be installed to control fluid flow from various subterranean zones. Some operators are now permanently installing a variety of devices and sensors in the wellbores. Some of these devices, such as sleeves, can be remotely controlled to control the fluid flow from the producing zones into the wellbore.

The sensors are used to periodically provide information about formation parameters, condition of the wellbore, fluid properties, etc. One problem with this approach is that the distance between the transmitter and certain sensors in the wellbore can be great, necessitating the installation of relatively large power
5 sources in the wellbore for providing power to such devices and sensors. Additionally, the quality of the data received from the sensors can suffer because of the large distance between such devices and the surface. It is therefore desirable to locate the power sources and communication and data processing devices closer to the downhole devices and sensors.

10 The vast majority of the oilfields contain a plurality of spaced wellbores. Each such wellbore requires services during its production life. Such services are provided from the wellhead equipment installed at the uphole end of each such wellbore. In one embodiment of the present invention, one or more access wellbores are drilled at strategic locations in the field, wherein each such access
15 wellbore is utilized to service a plurality of wellbores.

The present invention addresses the above-described problems with the prior art methods for constructing multiple wellbores from a single location and multi-lateral wellbores. In one method, the present invention provides for constructing a single relatively large diameter deep wellbore (access or main
20 wellbore) and then forming a plurality of relatively small diameter wellbores from near the bottom of the main wellbore. The single main wellbore can significantly reduce the overall drilling length and provides space for installing certain types of equipment within the main wellbore. One or more of the smaller wellbores may be formed in non-producing formations in the vicinity of a group of production

wellbores for storing power supplies, transmitters and receivers, data processing equipment to aid the drilling of other wellbores and to aid production of hydrocarbons from the production wellbores.

5

SUMMARY OF THE INVENTION

The present invention provides methods of forming multiple wellbores. In one method, a relatively large (diameter) and deep main or access wellbore is formed to a predetermined depth. A plurality of branch wellbores are formed from the main wellbore into reservoirs for producing hydrocarbons therefrom.

10 Wellhead equipment, including the blow-out-preventor stack, is preferably installed in the main wellbore. Additional equipment may also be placed in the main wellbore, preferably near the bottom. Such equipment may include: (a) fluid separation equipment for separating hydrocarbons, solids and water; (b) chemical injection equipment for injecting chemicals or additives into the

15 wellbores or the fluid separation equipment; (c) compressors for injecting compressed gas, such as nitrogen, into one or more of the wellbores; (d) compressors for compressing gas from the branch wellbores to the surface; (e) robotics devices for performing an operation downhole, including placing and/or removing devices or materials from the wellbores, performing end work such as

20 cutting, milling and reaming in the wellbores, inspecting wellbores and installing devices in the wellbores; (f) a control unit and data processing equipment for controlling devices in the wellbores and for processing information provided by various sensors placed in the wellbores; and (g) any other desired equipment for performing a useful function relating to the wellbores.

The fluid reaching the wellheads may be processed or at least separated in the main wellbore. With the above-described wellbore construction, formation fluids travel a relatively small distance from the perforation to the bottom of the main wellbore, because the formation fluids no longer need to travel to the earth's surface, several thousand feet from the bottom of the main wellbore. Since the pressure differential between the producing formation and the main wellbore bottom is substantially less than the pressure difference between the producing formation and the earth's surface, it is relatively easier for the formation fluids to travel to the main wellbore bottom compared to the surface. Due to the ease of reaching the main wellbore and the availability of physical space, pumps and processing equipment can be deployed in the main wellbore for relatively easy and efficiently transport of hydrocarbons to the surface. Further, a riser may be movably placed (stored) in the main wellbore for later use. The riser may be moved over any desired wellbore to perform a completion, production or workover operations.

Additionally, a secondary access wellbore may be drilled from the first or main wellbore to provide storage for equipment that may be utilized for controlling and/or monitoring drilling direction, actuating devices during completion and production phases of the wellbores and for monitoring and controlling wellbore performance by receiving and processing responses from permanently installed sensors in the secondary wellbores throughout the life of the wellbores.

Some of the equipment is preferably prefabricated at the surface and then deployed into the main wellbore. The prefabricated equipment may include a

processing unit and a plurality of pipes. One or more wellbores are then drilled from the pipes. The pipes may be in fluid communication with each other. Formation fluids from the various wellbores is processed by the processing unit. The prefabricated equipment may provide certain redundant equipment and may
5 be retrievable.

In an alternative method, a main wellbore may be drilled in an oilfield to service a number of pre-existing wellbores. Such an access wellbore may be connected to one or more of the preexisting wellbores and may contain the desired equipment, such as data processing and communication equipment,
10 power sources, fluid processing equipment, transmitters for transmitting commands to devices located in its associated wellbores, receivers for receiving signals from sensors at the surface or in other wellbores, etc. Wellbores can be drilled from the main wellbore to intersect the existing wellbores and may be used to enhance recovery from any number of the preexisting wellbores. This method
15 allows for managing the production from an entire field through one or more strategically located main wellbores.

Examples of the more important features of the invention have been summarized rather broadly in order that the detailed description thereof that follows may be better understood, and in order that the contributions to the art
20 may be appreciated. There are, of course, additional features of the invention that will be described hereinafter and which will form the subject of the claims appended hereto.

BRIEF DESCRIPTION OF THE DRAWINGS

For detailed understanding of the present invention, references should be made to the following detailed description of the preferred embodiment, taken in
5 conjunction with the accompanying drawings, in which like elements have been given like numerals, wherein:

FIG. 1 shows a schematic illustration of a plurality of wellbores formed from a large diameter main or access wellbore and with the access wellbore
10 containing certain equipment therein.

FIG. 1a shows a schematic illustration of the placement of certain equipment within the access wellbore of **FIG. 1** in relation to the plurality of wellbores.

15

FIG. 2 shows a schematic illustration of an alternative placement of certain equipment in the main wellbore shown in **FIG. 1**.

FIG. 2A shows yet another placement of certain equipment in the main
20 wellbore shown in **FIG. 2**.

FIG. 3 shows a schematic illustration of multiple wellbores formed from a main wellbore, wherein at least one wellbore is a non-producing wellbore that is utilized for facilitating the drilling, completion and operations of other wellbores.

FIGS. 4A-4B show a schematic illustration of a main wellbore having therein certain preformed equipment.

5 **FIG. 5** show a schematic illustration of a main wellbore formed for managing a preexisting field.

FIGS. 6A-6C show examples of reformed bundles of pipes for use in the main wellbore of **FIGS. 1-5**.

10

FIGS. 7A-7B show examples of certain uses of the casings utilized in the exemplary wellbores shown in **FIGS. 1-5**.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

15

In general, the present invention provides methods for forming multiple wellbores from a relatively large diameter main or access wellbore and wherein the main wellbore may also be utilized to house equipment and devices useful for performing certain functions or operations relating to one or more of the wellbores. **FIGS. 1, 1A, 2, and 2A** illustrate the formation of multiple wellbores from the main wellbore that is formed primarily in a non-producing formation. **FIG. 3** illustrates an example of forming a secondary wellbore from the main wellbore that can be utilized for retrievably or permanently storing certain devices, sensors and materials and or for waste disposal. The secondary

20

wellbore may contain apparatus that facilitates or communicates with various devices and sensors in other wellbores and/or at the surface to provide more efficient communication between such devices and sensors during drilling, completion of such other wellbores and then during the production of
5 hydrocarbons from such wellbores.

For the purposes of illustration only and not as any limitation, the present invention is described in terms of forming multiple wellbores from an offshore platform stationed at a predetermined location. The methods described herein, however, are equally applicable to the formation of onshore wellbores. Referring
10 to **FIGS. 1** and **1A**, to form multiple wellbores according to one method of the present invention, a relatively large diameter main or access wellbore **10** is drilled from a suitable platform or rig (not shown), such as a ship, jack-up rig or a semi-submersible rig. The main wellbore **10** terminates at a bottom **12** having inside dimensions that are sufficiently large to allow drilling of a desired number
15 of branch wellbores from the bottom **12**. A suitable casing **14** is placed in the main wellbore **10**. The casing may be preformed with one or more anchors **14a** and installed in place after drilling of the wellbore to its desired depth. A template **16** defining the size and location of the branch wellbores to be drilled is set at the main wellbore bottom **12**. Branch wellbores **20a-20n** are then drilled by
20 conventional methods through the template **16**. The main wellbore **10** is preferably drilled to a depth "d" which is a certain distance above that branch wellbore which has the least upper vertical section. In **FIG. 1**, branch wellbore **20n** is shown to have the least upper section **21n**. The branch wellbores **20a-20n** are drilled along their respective predetermined or planned wellbore paths

for producing hydrocarbons from subterranean formations. One or more lateral wellbores may also be drilled from any of the branch wellbores, such as wellbores **20b'**, **20b''** and **20b'''** drilled from the branch wellbore **20b**. Lateral wellbores, such as **20b'-20b'''** are referred to herein as multi-lateral wellbores.

5 Each of the branch wellbores **20a-20n** and the multi-lateral wellbores **20b'- 20b'''** is completed as desired by known methods in the oil industry to produce hydrocarbons from its associated reservoirs. Safety devices and other equipment, such as fluid flow control valves, blow-out-preventors, pressure measuring devices (collectively referred to herein as the "wellhead equipment")

10 are preferably installed at the bottom of the main wellbore **10**. **FIG. 1** shows wellhead equipment **22a-22n** installed at the main wellbore bottom **12** for branch wellbores **20a-20n** respectively. In the wellbore configuration shown in **FIG. 1**, fluid from each of the branch wellbores **20a-20n** is transported to a surface control unit **27** via separate flow lines **26a-26n** respectively. The fluid from the

15 control unit **27** passes to a separator **28** (at the sea bed for offshore operations and at the earth's surface for onshore operations), which separates oil, gas and water. The separated fluids are then transported from the separator **28** to their desired locations. To facilitate the flow of fluids from the branch wellbores **20a-20n** to the surface, a pump, such as pump **23b** associated with wellbore **20b**

20 (see **FIG. 1A**), or a common pump for more than one branch wellbores **20a-20n** may be installed in the main wellbore **10**. Any other equipment, such as shown by numerals **30** and **32**, may be installed in the main wellbore to perform a useful operation relating to the wellbores **10** and/or **20a-20n**, as more fully explained later.

FIGS. 2 and 2a show the placement and use of certain types of equipment and devices within the main wellbore **10**. A fluid processing unit **40** may be placed in the main wellbore **10** for processing fluids from one or more of the branch wellbores **20a-20n**. In the embodiment shown in **FIGS. 2 and 2a**, fluid
5 from each of the branch wellbores **20a-20n** is passed to the fluid processing equipment **40** respectively via fluid lines **41a-41n**. A separate fluid control valve **41a'-41n'** may be connected to each of the lines **41a-41n** to independently control the fluid flow from each of the branch wellbores **20a-20n** into the fluid processing unit **40**. The fluid processing unit **40** may include several stages or
10 several different types of equipment, generally designated herein by numerals **40a-40m**. For example, one stage or equipment **40a** may be a fluid separator that separates oil, gas, water and solids. Another stage or equipment may include equipment for processing or treating a fluid prior to transporting it to the surface. For example, the second stage may include chemical treatment
15 equipment for treating one or more of the separated fluids. The required chemicals may be stored in the main wellbore in a chemical storage tank (source) **45** and controllably supplied to the fluid processing equipment **40** via a line **47** and a control valve **47a**. Alternatively, chemicals from the source **45** may be selectively injected into any of the branch wellbores **20a-20n** via a separate
20 line and control valve associated with each such wellbore. As an example, **FIG. 2A** shows that chemical from the source **45** is supplied to the branch wellbore **20c** via a line **46c** and control valve **46c'** and to wellbore **20n** via a line **46n** and control valve **46n'**. The processed fluid is then transported from the processing fluid **40** to the surface via a suitable conduit **42**. Additionally, different types of

chemicals may be stored in separate storage tanks in the main wellbore **10** and supplied to the downhole equipment or the branch wellbores in the manner described above. Also, chemicals may be supplied from one or more sources at the surface (not shown).

5 Still referring to **FIGS. 2** and **2A**, a gas compressor **60** may be deployed in the main wellbore **10** for injecting compressed gas, such as nitrogen, into any of the branch wellbores **20a-20n** to aid in the formation, completion, production or servicing of any of the branch wellbores **20a-20n**. A gas compressor may also be provided to compress gas from the main wellbore, such as the gas separated
10 by the equipment **40** to the surface.

A riser **70** may be permanently hung or stored in the main wellbore **10** for use with any of the branch wellbores **20a-20n** during the drilling, completion, production or servicing of such wellbores. To install the riser over a particular branch wellbore, it is moved from its normal stored position, as shown by the
15 dotted lines **70**, to a suitable position over the wellhead equipment associated with that particular branch wellbore. To perform an operation in a particular branch wellbore, a second riser (not shown) is placed between the riser **70** and the offshore platform (not shown). Any suitable apparatus or method may be utilized to move the riser **70** to a desired location within the access wellbore **70**
20 and to install the second riser between the riser **70** and the offshore platform.

One or more robotics devices **80** may be placed in the main wellbore **10** for performing one or more desired operations downhole. For example, the robotics device **80** may be utilized to fetch or retrieve a device **82** stored in the main wellbore **10** and move it to a desired location within the main wellbore **10** or

into a selected one of the branch wellbores **20a-20n**. The robotics device **80** may be commanded to install a device, such as a pressure sensor, a temperature sensor or a fluid control valve, at a selected location downhole. It may also be directed to remove a device from a downhole location. In some applications, it may be desirable to include in the robotics device **80** inspection devices or sensors for inspecting a branch wellbore. Such a robotics device may be periodically commanded to travel through a desired branch wellbore and gather data relating to the operation and condition of such a wellbore or a portion thereof. The robotics devices may also be utilized (a) to measure parameters of interest relating to the branch wellbore **20a-20n** or the formations surrounding such wellbores, (b) to determine the fluid flow through individual production zones or portions thereof within any of the branch wellbores **20a-20n**, (c) to perform inspection of a casing in any of the wellbores for corrosion, pits, cracks and scaling, (d) to determine if coning is occurring at a location or zone in a particular branch wellbore, (e) to actuate a device downhole, such as a sliding sleeves, and (f) to perform a service operation, such reaming, cutting and milling.

One or more power sources such as power supplies or power generation units are preferably stored in the main wellbore for providing electrical power to selected downhole equipment. One or more hydraulic power units may also be provided in the main wellbore for supplying pressurized fluid to any hydraulically operated equipment in the main wellbore and/or in any of the branch wellbores. This places the power units closer to the equipment to be operated.

It should be noted that the main wellbore **10** has a relatively large diameter, typically ranging from about eighteen inches (18") to greater than sixty

inches (60")) and may extend several thousand feet, typically greater than one thousand (1000) feet into the earth, thereby providing a large amount of underground space for installing equipment and devices therein. Accordingly, the equipment in the main wellbore **10** may be placed at any suitable location in
5 the main wellbore **10** and in any suitable configuration.

It should be further noted that during the drilling of a wellbore, such as any of the branch wellbores **20a-20n**, a number of devices are utilized to perform a variety of operations and/or to provide useful information about the drilling and formation parameters. Additionally, during the completion of a producing
10 wellbore, such as the completion of any of the branch wellbores, a number of devices and sensors are installed for completing the wellbore and/or to facilitate the production of hydrocarbons over the life of such wellbores. Recently, the trend has been to install remotely-actuated devices and to install a variety of sensors permanently into producing wellbores to optimize the hydrocarbon
15 production throughout the life of such producing wellbores. In the present invention, such devices may operated or monitored from a control unit placed in the main wellbore. Additionally, such a control unit may be utilized to obtain information from the sensors in the various wellbores and to process such information according to programmed instructions as more fully explained below.

20 The operation of any of the equipment in the main wellbore **10** and devices in the branch wellbores **20a-20n** may be controlled by a control unit **100** (**FIG. 2A**) placed in the main wellbore **10**. The control unit may, however, be placed at the surface. The control unit **100** preferably includes a computer or one or more microprocessor devices and associated circuitry for receiving

information from the various equipment, devices and sensors in the main wellbore and from the various devices and sensors placed in the branch wellbores **20a-20n**. The control unit **100** preferably computes the values of selected parameters and manipulates data in accordance with programmed
5 instructions provided to the control unit **100**. The control unit **100** includes memory for storing data and programmed instructions. The control unit **100** controls the equipment and devices in the main wellbore **10** and the branch wellbores **20a-20n** in response to the values of the operating parameters in accordance with the programmed instructions provided to the control unit **100**.
10 The desired programs may be stored in the memory associated with the control unit **100** or provided from another location.

As noted earlier, during different phases in the life of a wellbore, there is a need to remotely operate certain devices, receive data or signals from a variety of sensors and process such data and signals to obtain information that is
15 utilized to maximize hydrocarbon production. Due to the great distance between the surface and the location of reservoirs, hostile downhole environment, limited space, and low data transmission rates for commonly used telemetry techniques, such as mud-pulse telemetry techniques, it is desirable to have the control unit and associated transmitters, receivers and power supplies as close as possible
20 to the devices in the wellbores. This can be accomplished by placing at least some of the devices in a secondary or access wellbore drilled either from the bottom of the main wellbore **10** as shown in **FIG. 3** or from a suitable surface location (not shown).

FIG. 3 shows a secondary or branch access wellbore **110** formed from the main wellbore bottom **12** to a predetermined depth. The secondary wellbore **110** is preferably drilled prior to drilling any of the branch wellbores **20a-20n**, because it can be utilized to facilitate the drilling and completion of the branch wellbores **20a-20n** and to facilitate production of hydrocarbons after such wellbores have been in production. Further, it may be desirable that the secondary wellbore **110** not be utilized for producing hydrocarbons. It may be a sacrificial wellbore, in that, it is to be utilized to facilitate other drilling and production activities. To that end, the secondary wellbore may be strategically placed relative to the other planned branch wellbores, such as wellbores **20a-20n**. In such instances, it is desirable to form the secondary wellbore **110** substantially in non-producing formations, as such formations tend to be harder than the hydrocarbon bearing formations. Additional secondary wellbores (not shown) may also be formed from the main wellbore or from a surface location. In the present invention, various types of transmitters, receivers, and sensors, generally denoted herein by numerals **120a-120b**, are placed at or conveyed to selected locations in the secondary wellbore **110**. A local control unit for processing data from such sensors may be placed within the secondary wellbore **110**. A desired number of power supplies, in the form of electricity generators or rechargeable batteries **112a-112b**, are suitably placed in the wellbore **110** for providing the required power to the devices and sensors **10a-120b** in the secondary wellbore **110**. As examples and not as limitations, the use of the secondary access wellbore **110** to perform certain functions and operations during different phases in the life of other wellbores will now be described. It will be noted that the secondary

wellbore **110** may be utilized to perform a variety of other functions or operations without departing from the concepts illustrated herein.

Certain uses of a secondary access wellbore, such as the wellbore **130**, during the drilling of a wellbore will now be described with reference to wellbore **120n** and FIG. 3. During drilling, a drilling assembly, such as assembly **140** having a drill bit **150** at an end thereof and a plurality of formation evaluation and other sensors, generally denoted herein by numeral **160**, is utilized to drill a wellbore, such as wellbore **20n**. As noted earlier, it is desirable to drill the wellbore **20n** along a course that will maximize hydrocarbon production from the subsurface reservoirs. Typically, to start drilling the wellbore **20n**, the wellbore is drilled along a predetermined course. Data from the various formation evaluation sensors and other sensors **160** is periodically evaluated and the drilling course is adjusted so as to drill the wellbore **20n** along a the most desired or optimum path.

The secondary wellbore **110** may be utilized to determine the true location of the drill bit **150** during the drilling of the production wellbore **20n** and for adjusting the drilling direction of the drill bit. During the drilling of the branch wellbore **20n**, when the sensor **140** is at location **162a**, the sensor **140** transmits signals relating to the true position of the drill bit relative to a surface location. The sensor **120a** in the secondary wellbore **110** detects such signals and transmits them to the control unit **130**, which processes such signals to provide the true location of the drill bit. The signals transmitted by the sensor about the drill bit **150** location may be in the form of acoustic signals. The use of the device **120a** provides a three point geometry, which provides an accurate measure of

the drill bit **150** location under the earth. If required, the drilling direction may be corrected by remotely adjusting a downhole device, such as remotely-operated kick-off device **169** or by making some other adjustment to the drilling assembly **160**. A transmitter placed in the secondary wellbore **110** may be utilized to adjust
5 the kick-off device **169**. The receivers **120a** may also receive data from other sensors in the section **140** and either process, which data may be processed by a suitable control circuit within the wellbore **110** or transmitted to the control unit **130** for further processing. This data may then be processed by the control unit **130** in the main wellbore **10** or a similar unit at the surface (not shown). The data
10 transmitted by the sensor **140** in the drill string **160** may relate to formation parameters of the formation surrounding the wellbore **20n**, wellbore and/or the operating condition of the drill stem. The above-described method of receiving the data at the secondary wellbore **110** is repeated periodically, such as when the drill bit has moved to the location **160b**, as shown in **FIG. 3**.

15 An example of a use of the secondary access wellbore **110** during the completion phase will now be described with reference to **FIG. 3** and lateral wellbore **20b'** drilled from the branch wellbore **20b**. As noted earlier, during completion, a number of devices are set to perform particular functions. They may include a remotely operable sliding sleeves, packer, perforating device, flow
20 control valve for controlling flow of fluids through the production wellbore, a pressure sensor and a temperature sensor. For example, **FIG. 3** shows a device **120b** in the secondary wellbore **110** controlling the operation of a device **155** during the completion phase of the wellbore **20b'**. The signal transmission path between the device **120b** and the device **155** is indicated by the dotted path d_3 .

An example of the use of the secondary access wellbore **110** during the production phase will now be described while referring to **FIG 3** and branch wellbore **20a**. **FIG. 3** shows a sensor **170** permanently placed in the wellbore **20a**, which may be remotely activated to transmit certain information during the production phase of the wellbore **20a**. The sensor may be a pressure sensor, temperature sensor, or a resistivity sensor for providing information about the water content. The device **120s** may be utilized to activate the sensor **170** and to receive data transmitted by the sensor **170**. Such received data may then be processed by the device **170** and/or transmitted to another device, such as the control unit **130** for further processing. The device **120b** may be utilized to activate a device **172** installed in the wellbore **20a**. The device **172** may be a fluid flow control device or a sliding sleeve device or any other device that is designed to be activated by the device **120b**. The communication path between the device **120a** and sensor **170** is shown by line **d4** while path **d5** shows the communication path between the device **120b** and the device **172**.

Additionally, a series of spaced seismic sensors **177**, such as hydrophones or geophones, may be placed in the secondary wellbore **120b**. During the drilling of a wellbore, such as the wellbore **20n**, the seismic receivers detect acoustic signals produced by the drill bit **150** or generated by a source in the drill string **160**. The detected signals are processed by the control unit **130** or by a surface unit. The seismic data so collected is then utilized to update preexisting seismic information about the earth formations (seismographs), which in turn can be utilized to update the wellpath of the wellbore **20n** and the

wellbores to be drilled in the future. Alternatively, a seismic source may be placed in the secondary wellbore **110** and the seismic receivers in the drill string.

The main wellbore **10** and the secondary wellbore **110** may be filled with a desired fluid. In some cases it may be desirable to fill the main wellbore, at least
5 partially, with a heavy fluid (sometimes referred in the oil industry as the "kill-weight" fluid) to maintain the pressure in the wellbore **10** above the formation pressure to prevent any blow outs. As noted earlier, in some cases it may be more desirable to drill the secondary wellbore **130** from the sea bed or the earth's surface.

10 Forming a large diameter deep main wellbore, such as the wellbore **10** (**FIG. 1**) can significantly reduce the total drilling footage. It allows the installation of various types of equipment traditionally instead on the sea bed or the earth's surface in the main wellbore. The equipment placed near the main wellbore bottom can substantially closer to the reservoirs than the similar equipment
15 installed at the surface. Any processing done near the formation can prevent asphaltene flocculation, reduce sediment deposition in tubings, and can significantly improve the performance of the wellbores. The equipment placed in the main wellbore can prevent damage and theft. The secondary access wellbore, such as wellbore **110** (**FIG. 3**), provides permanent subsurface
20 locations relatively close to the production wellbores which can be utilized to facilitate the drilling and completion of such production wellbores and also facilitate the production of hydrocarbons from such wellbores. It further allows placing certain transmitters, sensors and data processing equipment much closer

to the devices in the producing wellbores, allowing improved monitoring and control of such wellbores.

FIG. 4A shows a schematic of an elevation view of a main wellbore **200** containing an exemplary preformed equipment **250** (also referred to herein as the preassembled or prefabricated equipment). **FIG. 4B** shows a top view of the equipment **250**. The preformed equipment **250** may include any type of assemblies and devices and may be configured in any desired manner to suit the particular requirements. The exemplary equipment **250** shown in **FIGS. 4A-4B** includes a main section **210** that contains a fluid processing unit **214** and a plurality of casings **212a-212d**. Casings **212a**, **212b** and **212d** are shown in fluid communication with the fluid processing unit **214** via conduits **218a**, **218b** and **218d** respectively. Casings **212a** and **212b** are in fluid communication with each other via a conduit **219**. Casing **212c** is independent, i.e., it is not connected to any of the other casings or the fluid processing unit **214**. The equipment **250** is preferably fabricated at the surface prior to deploying it in the main wellbore **200**. In the example of **FIGS. 4A-4B**, the main wellbore **200** is drilled to a desired depth **220** which depending upon the application may or may not be lined with a casing shown by the dotted lines **222**. Data and signals communications paths and any other structural or mechanical connections may be preformed in the equipment **250**. The preassembled equipment **250** is then deployed or placed in the wellbore **200**. Casings **212a-212d** are designed for forming or drilling a separate wellbore therefrom. Accordingly, a separate wellbore is then formed from each of the casings **212a-212d**. As shown, secondary wellbores **216b-216d** respectively are formed from the casings **212b-212d**. Such wellbores are

also referred to herein as the secondary wellbores. The wellbore formed from the casing **212a** is obscured by the wellbore **216c** and is thus not shown. Casing **212b** includes a preformed juncture **230** which facilitates the drilling of the lateral wellbore **216b**.

5 In the example of **FIGS. 4A-4B**, the wellbores **216b** and **216c** are drilled into subsurface reservoirs for producing hydrocarbons **224b** and **224c** respectively. The wellbore (not shown) from the casing **212a** may be a producing or non-producing well. The wellbore **216d** is preferably drilled into a non-hydrocarbon bearing formation and is utilized for waste disposal purposes
10 as described below or for some other purpose. The wellbores **216a-216d** are then completed by any known method. The casing **212d** is sealingly divided into an upper section **234a** and a lower section **234b** by a packer or another suitable device. The processed fluid from the processing unit **214** flows to the surface via the upper section **234a** while the waste **224d** from the processing unit is
15 discharged into the wellbore **216d** via the lower section **234b**. Appropriate wellhead and fluid processing equipment **240d** is installed over the casing **212d** and it serves as the primary wellhead equipment for production wellbores **212a**, **212b** and **212d**. Wellhead and fluid processing equipment **240a** and **240c** is respectively installed over the casings **212a** and **212c** as a secondary
20 equipment, which is utilized for servicing their respective wellbores and as redundant safety and fluid processing units, especially when while the processing unit **214** is in service or is inoperable. Since the wellbore **216c** is not in fluid communication with other wellbores in the system, it would require its own wellhead equipment **240c**. The open or unfilled areas **245** of the wellbore **200**

may be capped at the surface with a cap **215**, which would leave such area at the atmospheric pressure or it may be filled with a heavy fluid, grout or cement for safety or other reasons.

The equipment **250**, in whole or in part, may be designed to be retrievable
5 from the main wellbore **200**. For example, the fluid processing unit **214** may be retrieved from the casing **210** for servicing or replacement. Similarly any of the casings may be retrieved to the surface while leaving the remaining equipment in the wellbore **200**. Appropriate valves are provided to regulate the flow of the fluids between the various wellbores and the fluid processing unit **214**. Valve
10 **242** regulates the flow of the fluid **224b** from the wellbore **216b**. Valve **244a** regulates fluid flow from the processing unit **214** to the primary wellhead equipment **240b** while valve **244b** regulates the flow of the waste or discharge **224d** from the processing unit **214** to the wellbore **216d**. Additionally, valve **243** regulates flow of the fluid between the casings **212a** and **212b**.

15 During normal production, the formation fluid from the wellbores **216a** and **216b** flows into the processing unit **214** where water and other undesirable matters such as debris and asphaltenes are removed from the formation fluids. Clean fluid, such as oil, passes from the processing unit **214** into the upper section **234a** via conduit **218d₁**. Water and other waste is discharged into the
20 wellbore **216d** via conduit **218d₂**. A pump **246a** may be installed at a suitable location to facilitate the flow of the clean fluid to the surface. Also, a pump **246b** may be installed in the lower section **234b** to facilitate the flow of materials from the processing unit **214** into the waste wellbore **216d**. In the equipment configuration described above, the fluid flow control devices are preferably

installed outside the production wellbores **216a** and **216b**. This increases the efficiency of transporting the formation fluids uphole and allows easier passage of workover and servicing devices into such wellbores.

If a particular wellbore, such as wellbore **216b** needs to be serviced, the
5 valve **242** is closed allowing an operator to perform the required services via the wellhead equipment **240b**. When the fluid processing unit **214** is inoperable, the formation fluid **224b** from the wellbore **216b** flows to the wellhead equipment **240b** for processing. Fluid from the casings **212a** and **212b** may be combined by opening the valve **243**. The above-described system provides redundancy of
10 certain equipment and fluid processing, which allows uninterrupted production from wellbores when the processing unit **214** is inoperable. It should be noted that **FIGS. 4A-4B** show an exemplary equipment only and this invention is not limited to such equipment. It should be obvious that this invention provides a method of forming wellbores wherein a desired type of equipment is
15 prefabricated at the surface and then installed in a main wellbore. One or more production wellbores are then formed from the main wellbore to produce hydrocarbons from the subsurface formations.

FIG. 5 shows an exemplary illustration of the formation a main wellbore **300** in an oilfield **301** having a plurality of preexisting wellbores **302a-302n**. The
20 main wellbore **300** may be utilized service, workover, or revive one or more of such preexisting wellbores. The main wellbore **300** may also be utilized to drill additional wellbores for recovering hydrocarbons from the field **301**. For the purpose of explanation and not as any limitation, **FIG. 5B** only shows certain specific applications of the wellbore **300**.

Still referring to **FIG. 5**, the wellbore **302a** contains two producing lateral wellbores **303a** and **303b**. The wellbore **302n** is a vertical wellbore having a single production zone **315**. During normal production, fluid **308a** from the lateral wellbore **303a** and fluid **308b** from the lateral wellbore **303b** flow to the surface via the wellbore **302a**. If for some reason fluid flow from the lateral **303b** is inhibited and cannot be economically remedied, then the wellbore **302a** may be plugged at a location **306** below the upper lateral **303a**. A recovery wellbore **304a** may then be drilled to intersect the wellbore **302a** or to directly intersect (not shown) the lateral **303b** to recover hydrocarbons from the lateral **303b**.

Alternatively, a lateral wellbore **304b** may be drilled to recover hydrocarbon from the reservoir tapped by the lateral **303b**. Instead, the lateral **304b** may be utilized to inject fluids **311** into the subsurface formations to enhance recovery from one or more of the preexisting wellbores **302a-302n**. A wellbore, such as wellbore **304c** may be drilled for enhancing production from a particular zone, such as zone **315** associated with the wellbore **304n**. Prior to this invention, the common practice is to service, workover or revive each preexisting wellbore separately, which requires moving the drilling and servicing equipment to each well as required. Further, such methods do not enable managing the entire field **301** in any comprehensive manner. The above-described method enables strategically locating one or more main wellbores, such as the wellbore **300**, in the field, such as the field **301**, and then drilling one or more wellbores from such main wellbores to manage production from several wells in the field, thereby increasing the overall production from such preexisting fields.

FIGS. 6A-6C show examples of certain preformed bundles of casings or pipes that may be installed in the main wellbore, such as wellbore **200**. **FIG. 6A** shows a bundle **410** which contains a main casing **402** with a plurality of casing **403a-403n** disposed around the main casing **402**. **FIG. 6B** shows a large casing **420** containing a plurality of casings therein. The casing bundle of **FIG. 6C** is similar to that of **FIG. 6A** but includes a common manifold **425** at the bottom end of the cluster. the manifold **425** may be used as conventional templates for drilling multiple wellbores from a single location. Any number of other clusters of pipes may be prefabricated at the surface and deployed in the main wellbore **200**. Each pipe in the cluster may be utilized for a specific purpose. for example a casing may be used to drill a wellbore, store chemicals or other materials, store equipment or devices including robots that can move materials or equipment and/or perform specified operations, or for any other purpose.

FIGS. 7A-7B provide examples of some of the uses of the pipes in the bundles described above. **FIG. 7A** shows a casing **450** containing a device **452**, which may be a robot, vessel or chamber, power source such as a generator, fuel cell or battery, computing or data processing unit, communication device or a sensor or any other useful device. The casing **450** or another casing may also contain a unit that recharges the robot. **FIG. 7B** shows a main casing **460** which has a conduit **462** wrapped around the main casing. The casing **460** may be similar to the casing **10** of **FIGS. 1-3**. The conduit **462** may be utilized as a heat exchange unit or may contain sensors to provide formation evaluation information or may be utilized to inject chemicals at selected locations.

While the foregoing disclosure is directed to the preferred embodiments of the invention, various modifications will be apparent to those skilled in the art. It is intended that all variations within the scope and spirit of the appended claims be embraced by the foregoing disclosure.

WHAT IS CLAIMED IS:

1. A method of forming a plurality of wellbores for producing hydrocarbons from earth formations, comprising:

- 5 (a) forming a main wellbore of relatively large cross-sectional area in the earth to a predetermined depth, said main wellbore terminating at a bottom;
- (b) installing preselected equipment within the main wellbore; and
- 10 (c) forming a plurality of secondary wellbores of smaller cross-sectional area than the main wellbore and extending from the main wellbore bottom, at least one secondary wellbore intersecting a hydrocarbon-bearing formation for producing hydrocarbons.

2. The method of claim 1, further comprising including in the preselected equipment that is at least one of (a) a wellhead equipment placed on a
15 secondary wellbore, (b) a compressor compressing a fluid from the main wellbore to the surface or a secondary wellbore, (c) a processor processing signals and data received from the secondary wellbores, (d) a fluid processing unit receiving fluids from the secondary wellbores and separating said received fluids into at least two constituents, (f) a chemical injection apparatus injecting a chemical from
20 a source thereof into a secondary wellbore, (g) a pump for pumping hydrocarbons from the main wellbore to the surface, (h) a pump for pumping a fluid from the main wellbore into a secondary wellbore, (i) a control unit controlling the operation of a device downhole, (j) a robotics device to perform a selected operation downhole, (k) an electric generator fueled by the produced

hydrocarbons, (l) a hydraulic power unit for providing a pressurized fluid downhole, (m) a template defining the drilling location of the secondary wellbores from the main wellbore, (n) casings, one casing for each said secondary wellbore and inter connected with the preselected equipment with predetermined
5 communication paths.

3. The method of claim 1 further comprising prefabricating at least a portion of the preselected equipment at the surface before positioning said preselected equipment in the main wellbore.

10

4. The method of claim 3, wherein the prefabricating includes one of (i) providing fluid flow connections between selected components of the preselected equipment, (ii) providing mechanical or structural connections between selected components of the preselected equipment; (iii) providing signal path connections
15 for communicating signals and data, (iv) providing flow control devices at selected locations in the preselected equipment, and (v) providing one or more storage areas for storing selected materials.

5. The method of claim 1 further comprising including in the preselected
20 equipment a plurality of casings with prefabricated fluid flow connections therebetween at selected locations.

6. The method of claim 5 further comprising installing flow control devices at selected locations in the , wherein before placing said casings in the main wellbore.

5

7. The method of claim 1, wherein at least a portion of the preselected equipment is retrievable from the main wellbore to the surface.

8. The method of claim 1 further comprising including in the preselected
10 equipment a primary apparatus that performs a preselected task and a redundant apparatus that can be operated to perform at least a part of the preselected task in lieu of the primary equipment.

9. The method of claim 1 further comprising:

- 15 (i) including in the preselected equipment a fluid processing unit and a plurality of casings; and
- (ii) prefabricating fluid flow connections between the fluid processing unit and the casings at the surface.

20 10. The method of claim 9 further comprising:

- (i) flowing the formation fluids to flow from at least one casing into the fluid processing unit and processing said received fluid to obtain a refined fluid; and

(ii) flowing the refined fluid to the surface.

11. The method of claim 10 wherein the processing of the fluid results in waste materials and wherein said method further comprises discharging
5 said waste materials into a subsurface formation.

12. The method of claim 9, wherein the fluid processing unit is one of (i) an oil and water separator, (ii) a chemical treatment unit, and (iii) a system that utilizes a biological mass for treating fluids.

10

13. The method of claim 1 further comprising placing a wellhead equipment adjacent the bottom of the main wellbore over at least one of the wellbores formed from the main wellbore bottom.

15 14. The method of claim 1 further comprising placing a riser within the main wellbore and movable mounted therein to a position over at least one secondary wellbore formed from the main wellbore.

15. The method of claim 1 further comprising placing a processor in the main
20 wellbore, said processor receiving data from at least one sensor placed within a secondary wellbore and processing such data to provide information about a parameter of interest relating to the secondary wellbore.

16. The method of claim 12 further comprising selecting the parameter of interest from a group consisting of pressure, temperature, a wellbore fluid characteristic, a characteristic of the formation surrounding the production wellbore, a characteristic of a bottomhole assembly utilized for drilling the
5 production wellbore, and a parameter relating to the flow of fluids from a formation into the production wellbore.

17. The method of claim 1 further comprising filling the main wellbore with a flowable material to a predetermined level above at least a portion of the
10 equipment for holding said equipment in position in the main wellbore.

18. The method of claim 1 further comprising including in the preselected equipment a robot that performs a predetermined operation downhole that is at least one of (i) installing a device downhole, (ii) removing a device from a
15 predetermined location, (iii) performing a milling operation in one of the wellbores, (iv) performing a cutting operation, (v) performing a reaming operation, (vi) performing a testing function, (vii) performing casing inspection, (ix) gathering data from at least one sensor disposed in one of the wellbores, (x) a repairing operation, and (xi) activating a device downhole.

20

19. The method of claim 1, wherein the main wellbore is formed primarily in non-hydrocarbon producing formations.

20. The method of claim 1 further comprising placing in the main wellbore a processor that manipulates data obtained downhole during one of (i) drilling of a wellbore, (ii) completion of a wellbore, (iii) production of fluids through a wellbore, (iv) a servicing operation, and (v) a workover operation.

5

21. The method of claim 1, wherein the main wellbore is formed in an oilfield having existing wellbore and wherein the method further comprises establishing fluid communication between one or more of the existing wellbores and the main wellbore.

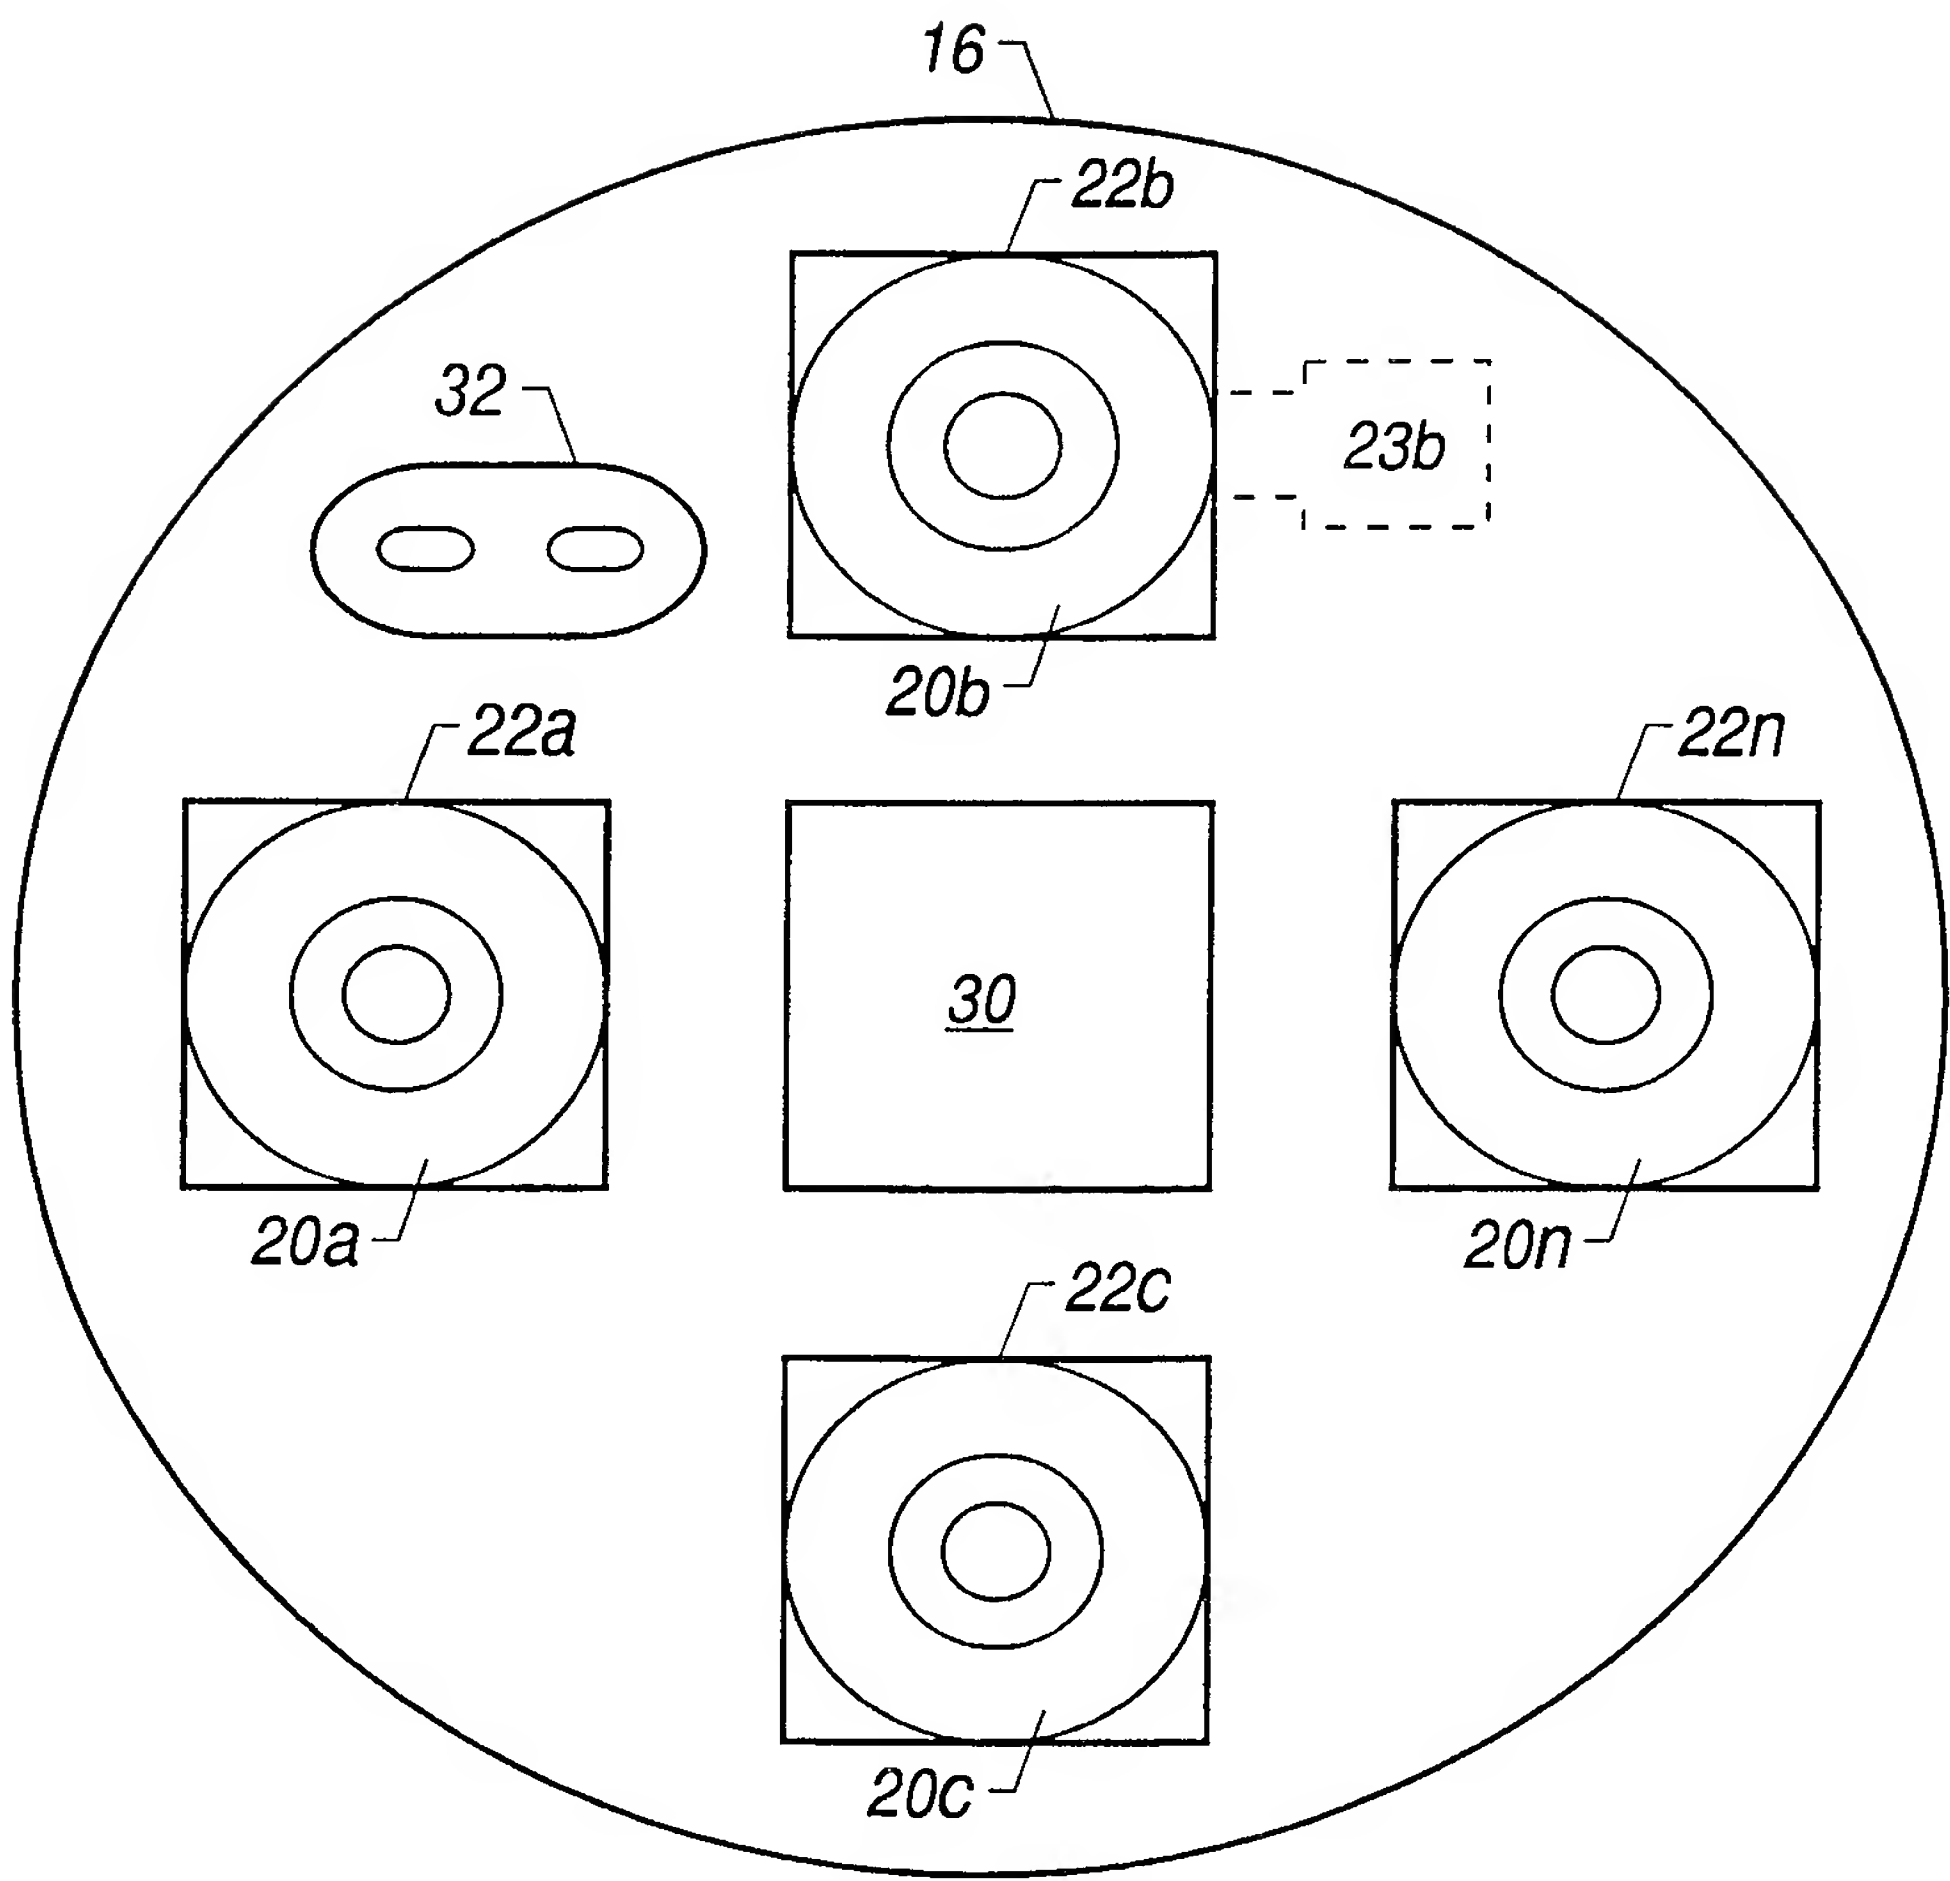


Figure 1B

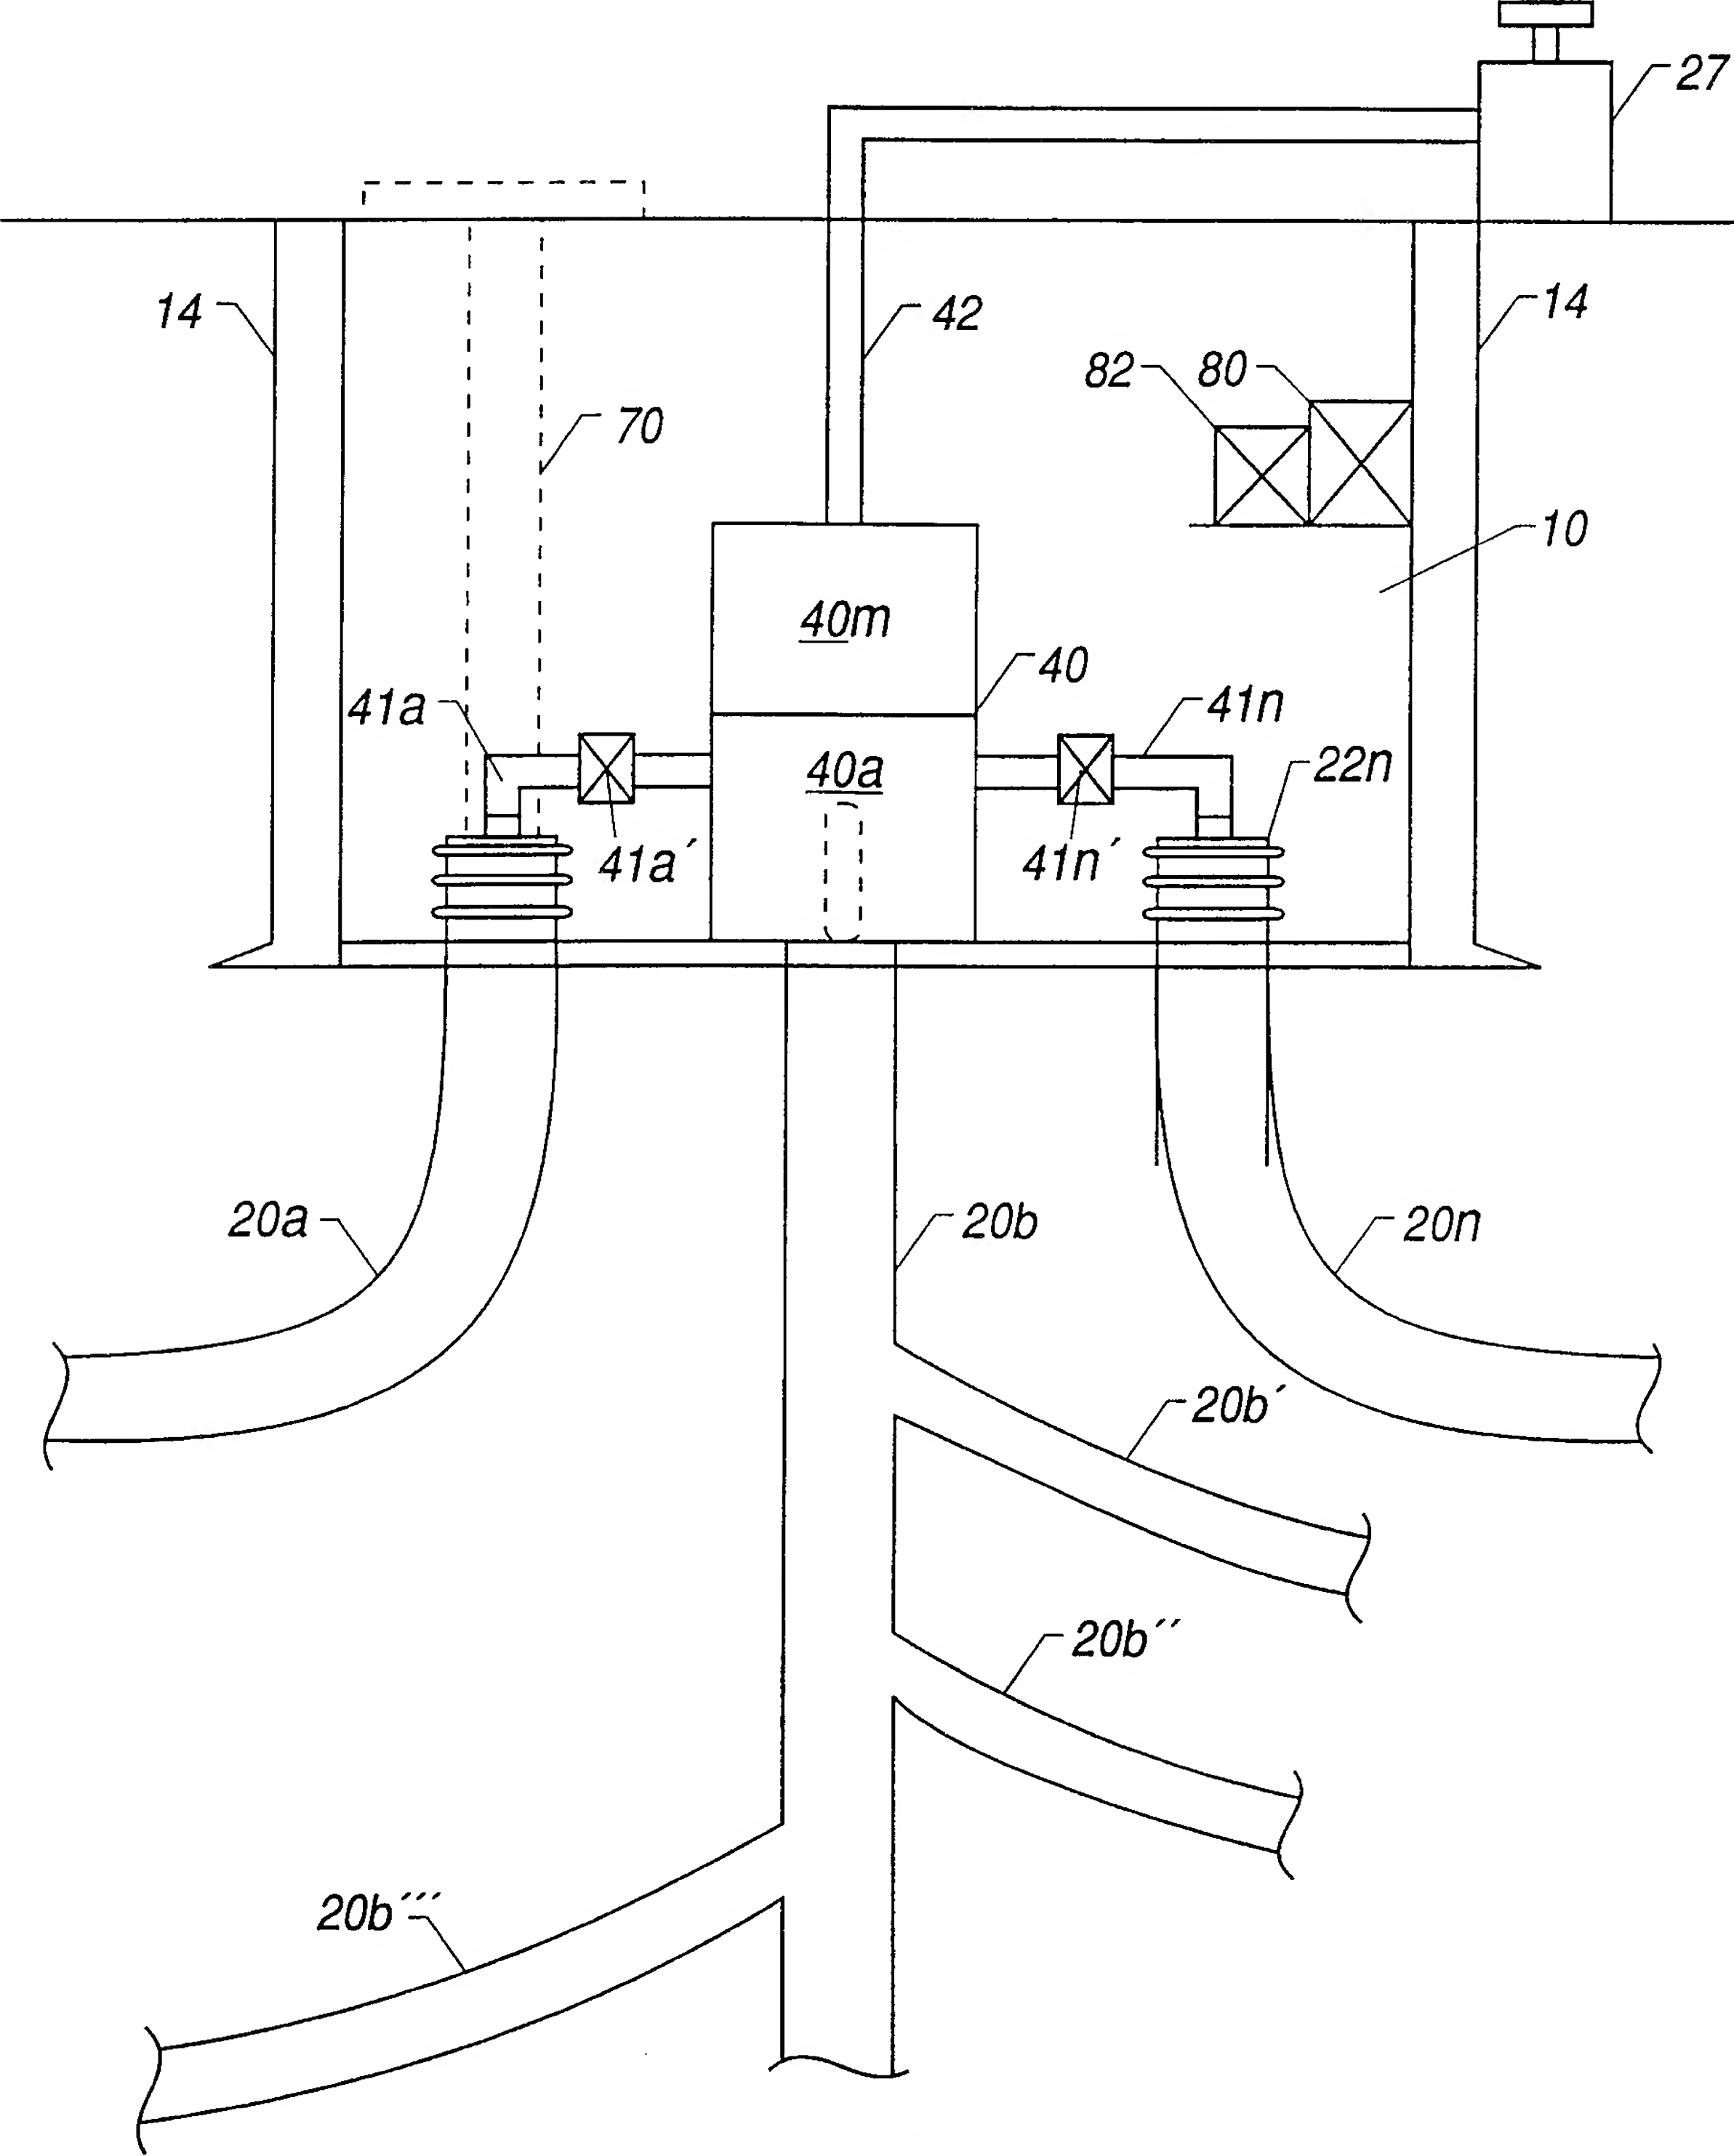


Figure 2A

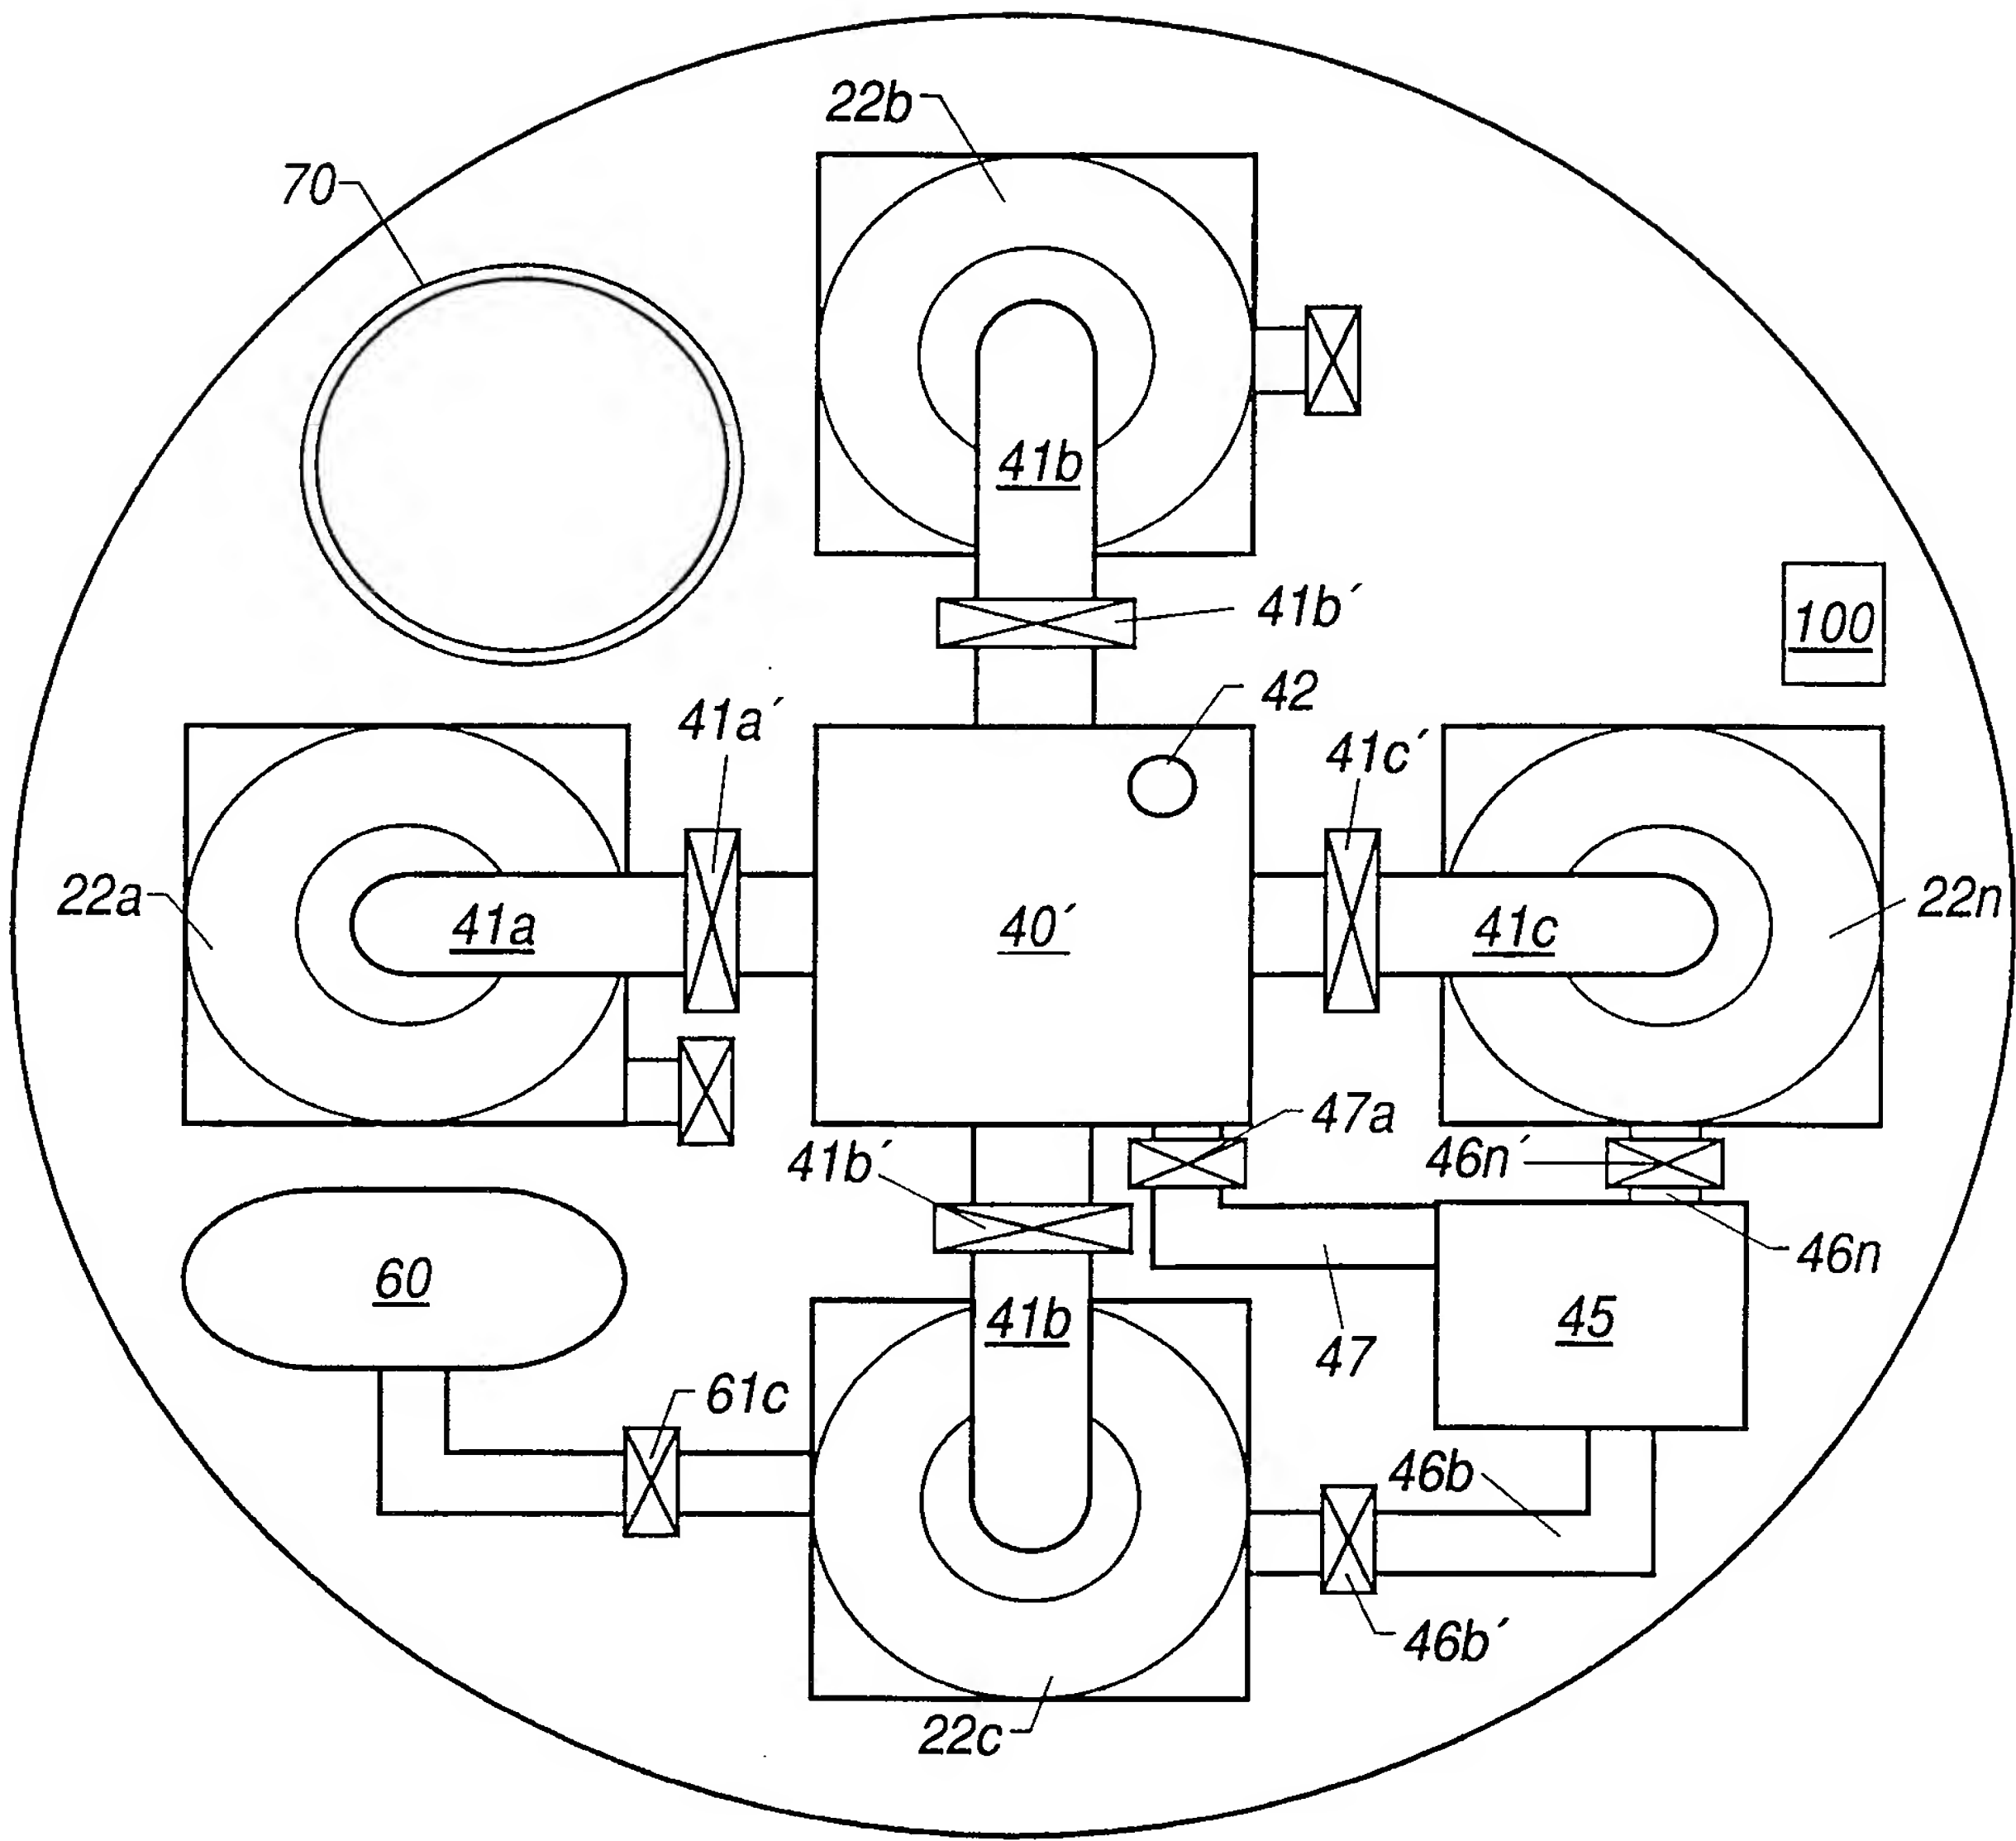
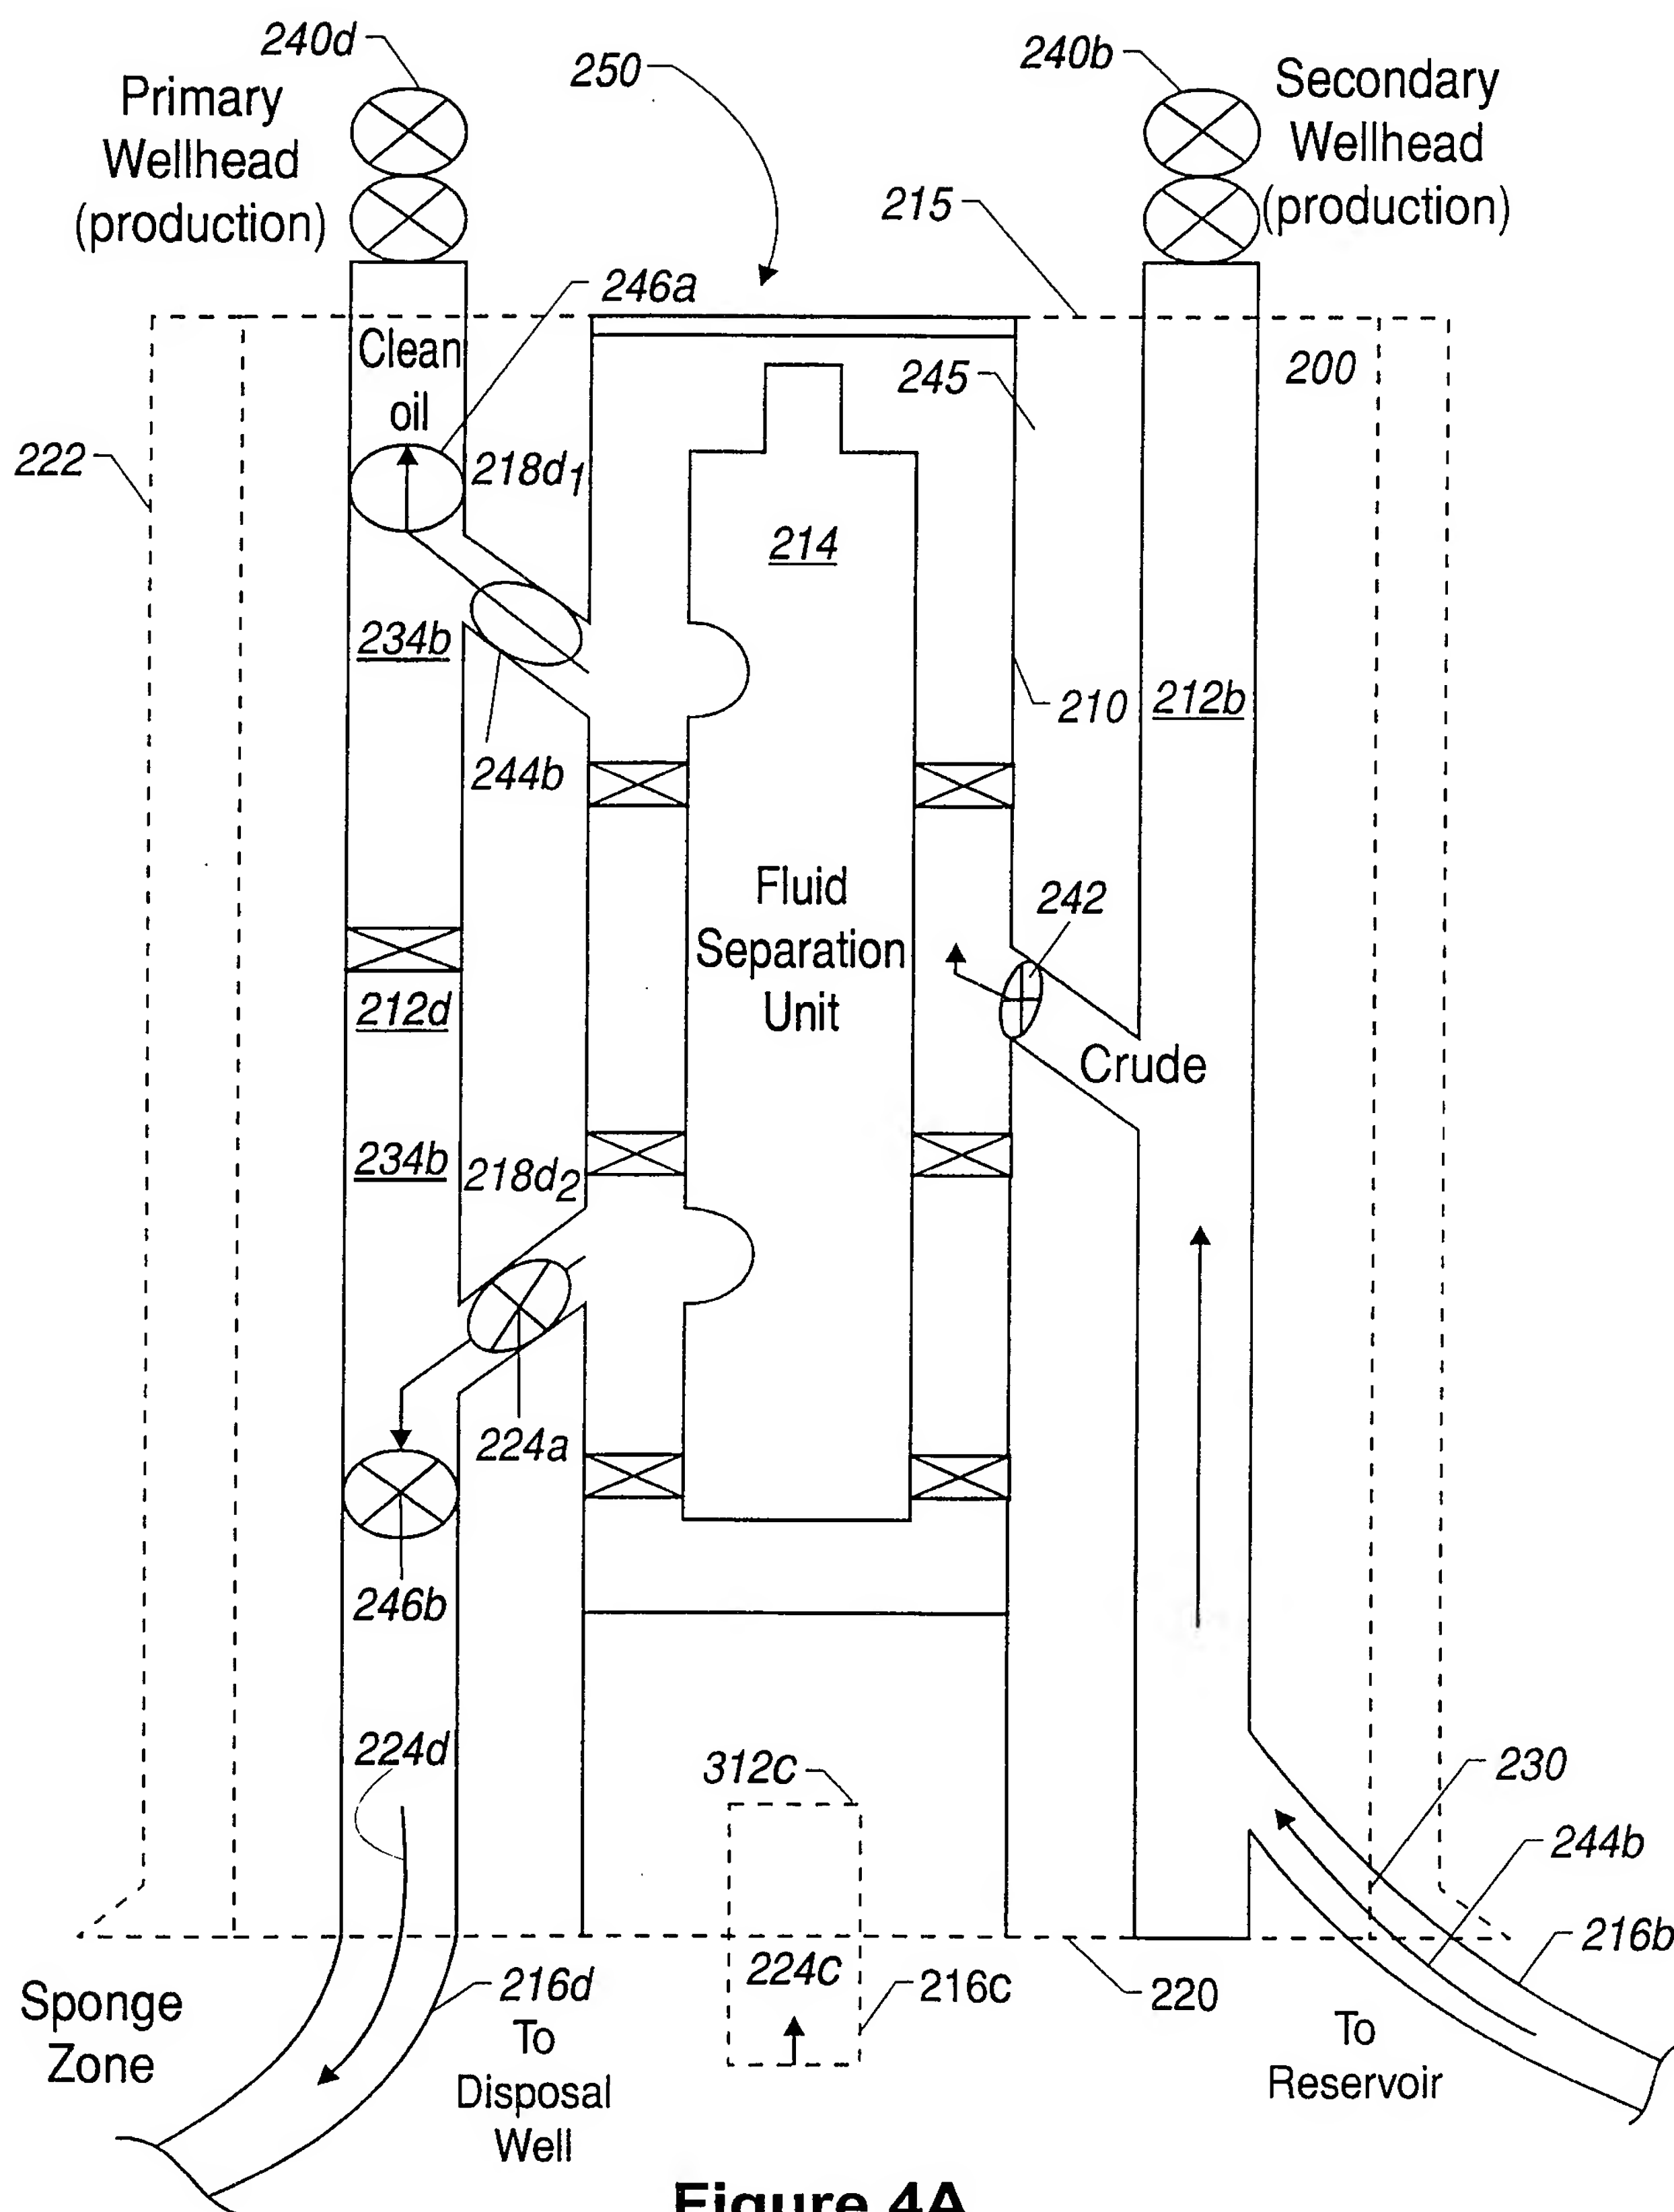


Figure 2B

6/9

**Figure 4A**

SUBSTITUTE SHEET (RULE 26)

7/9

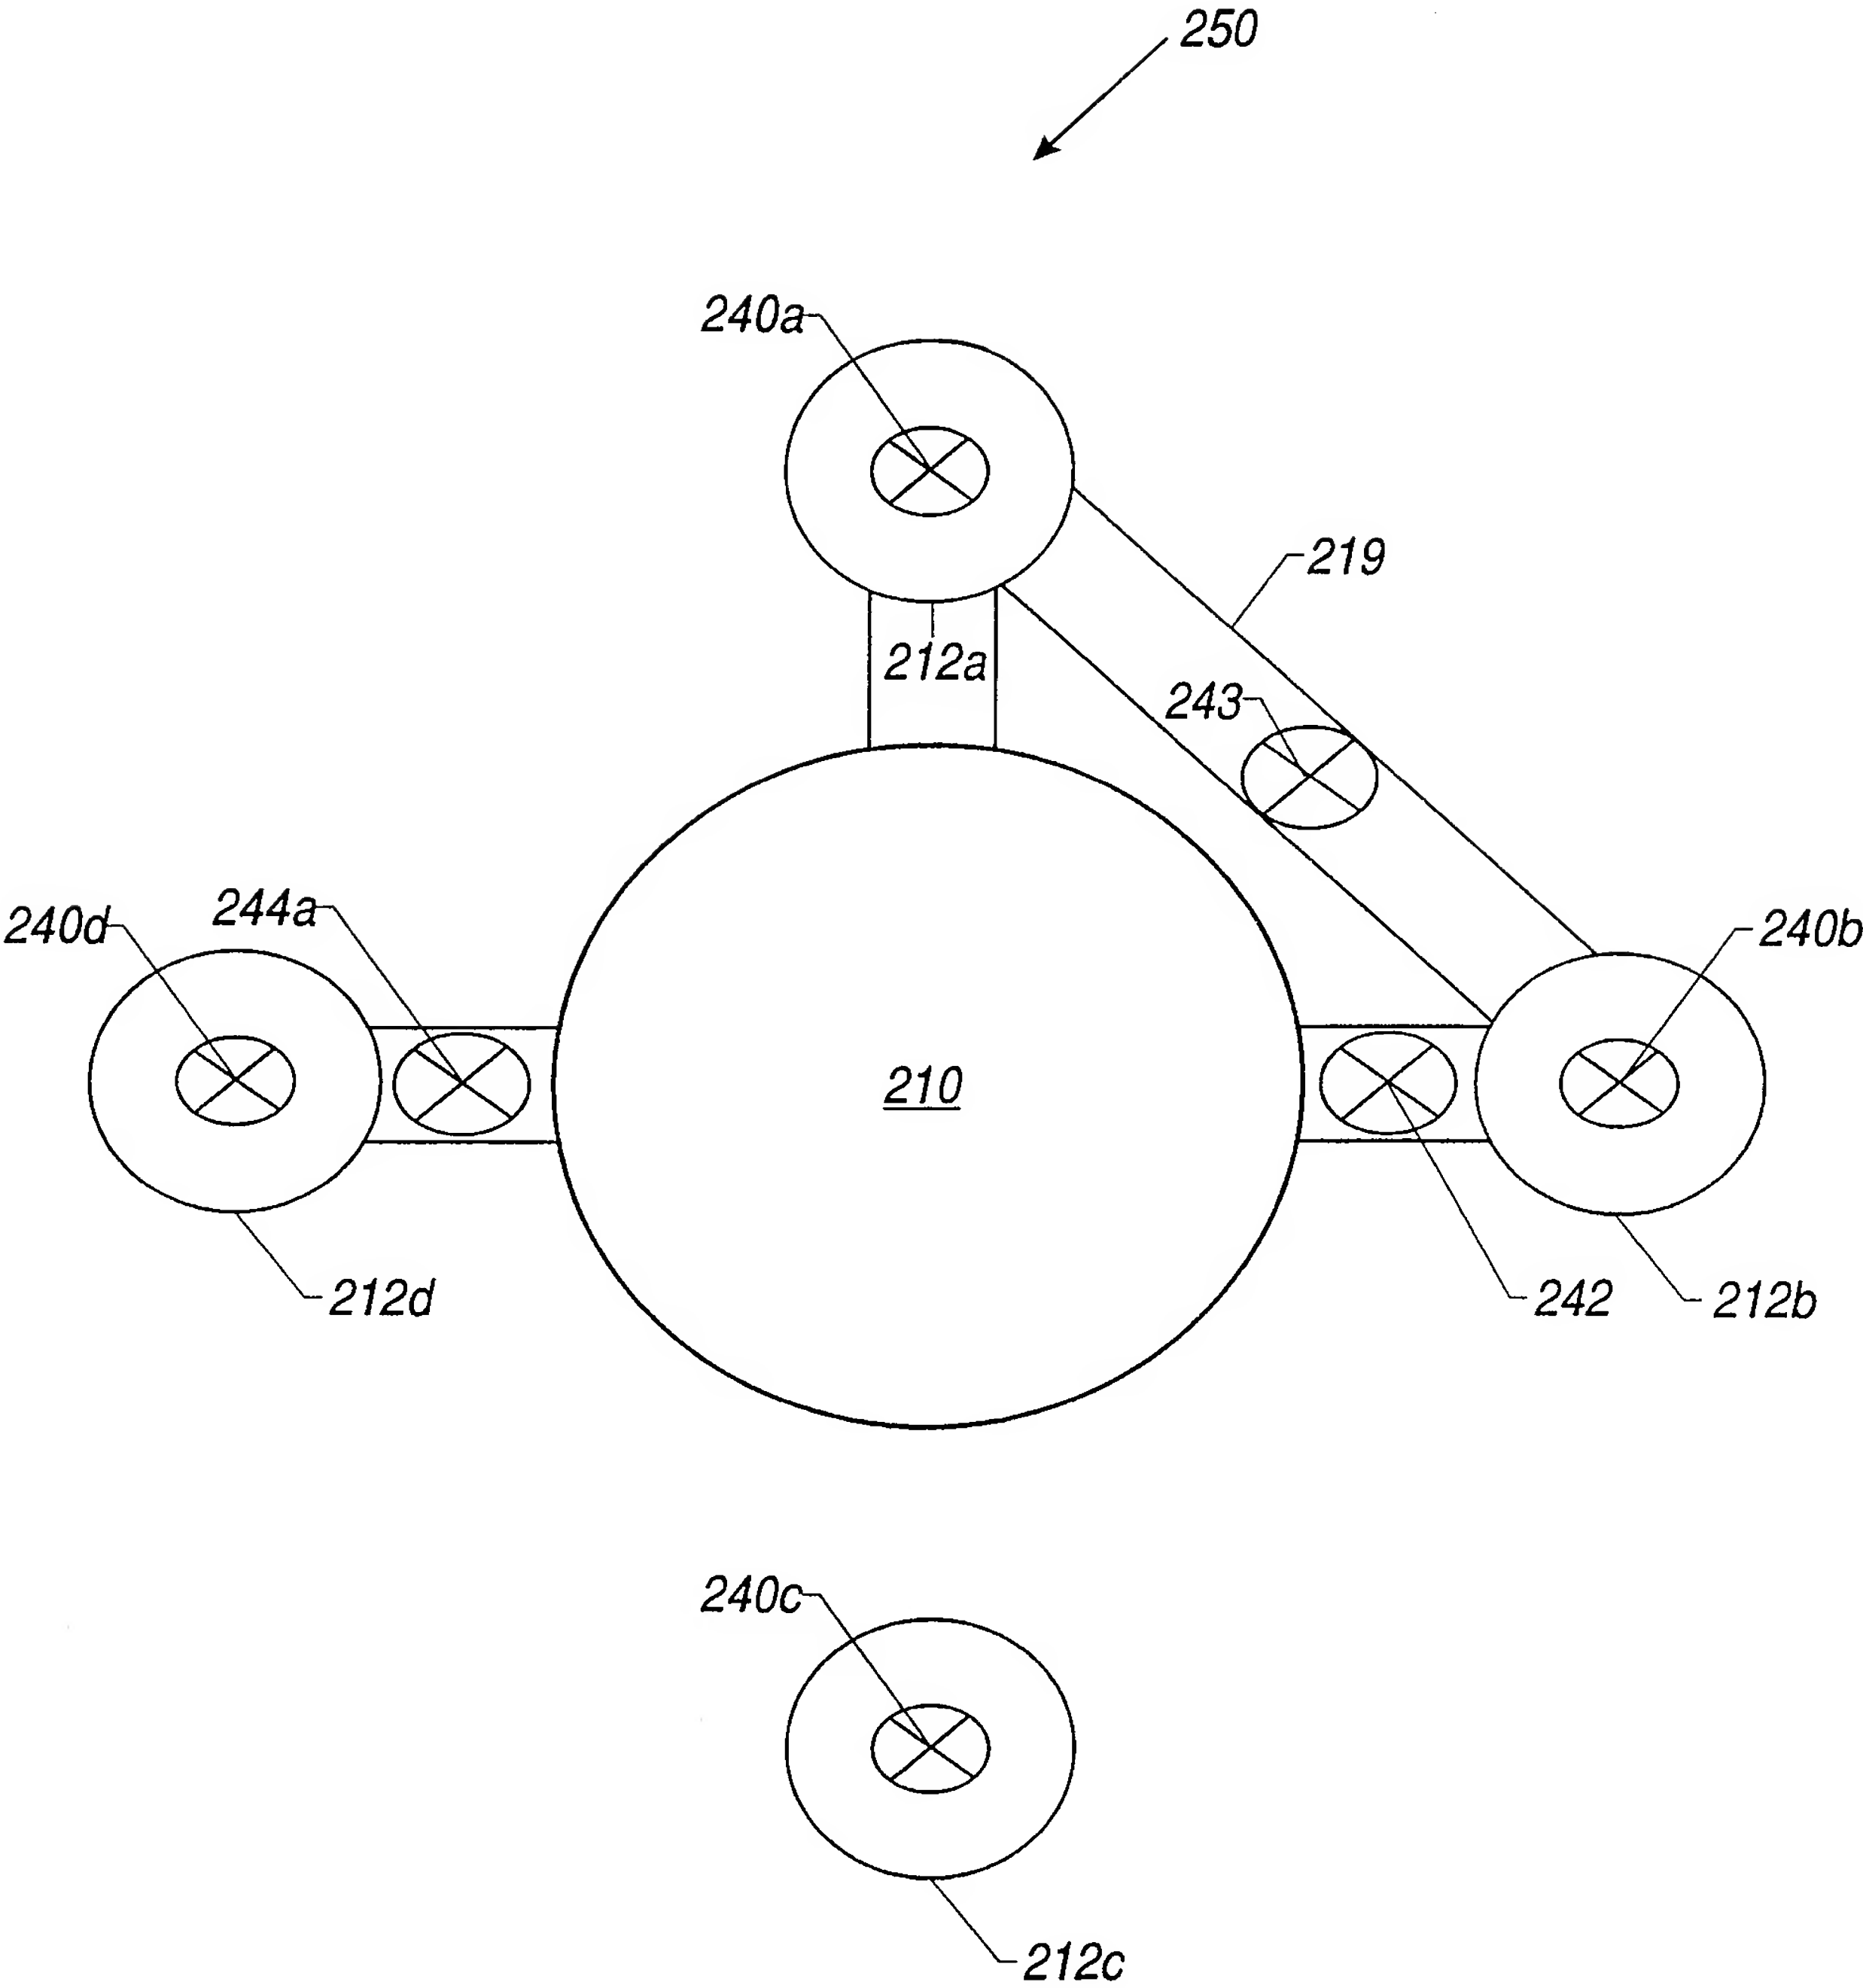


Figure 4B

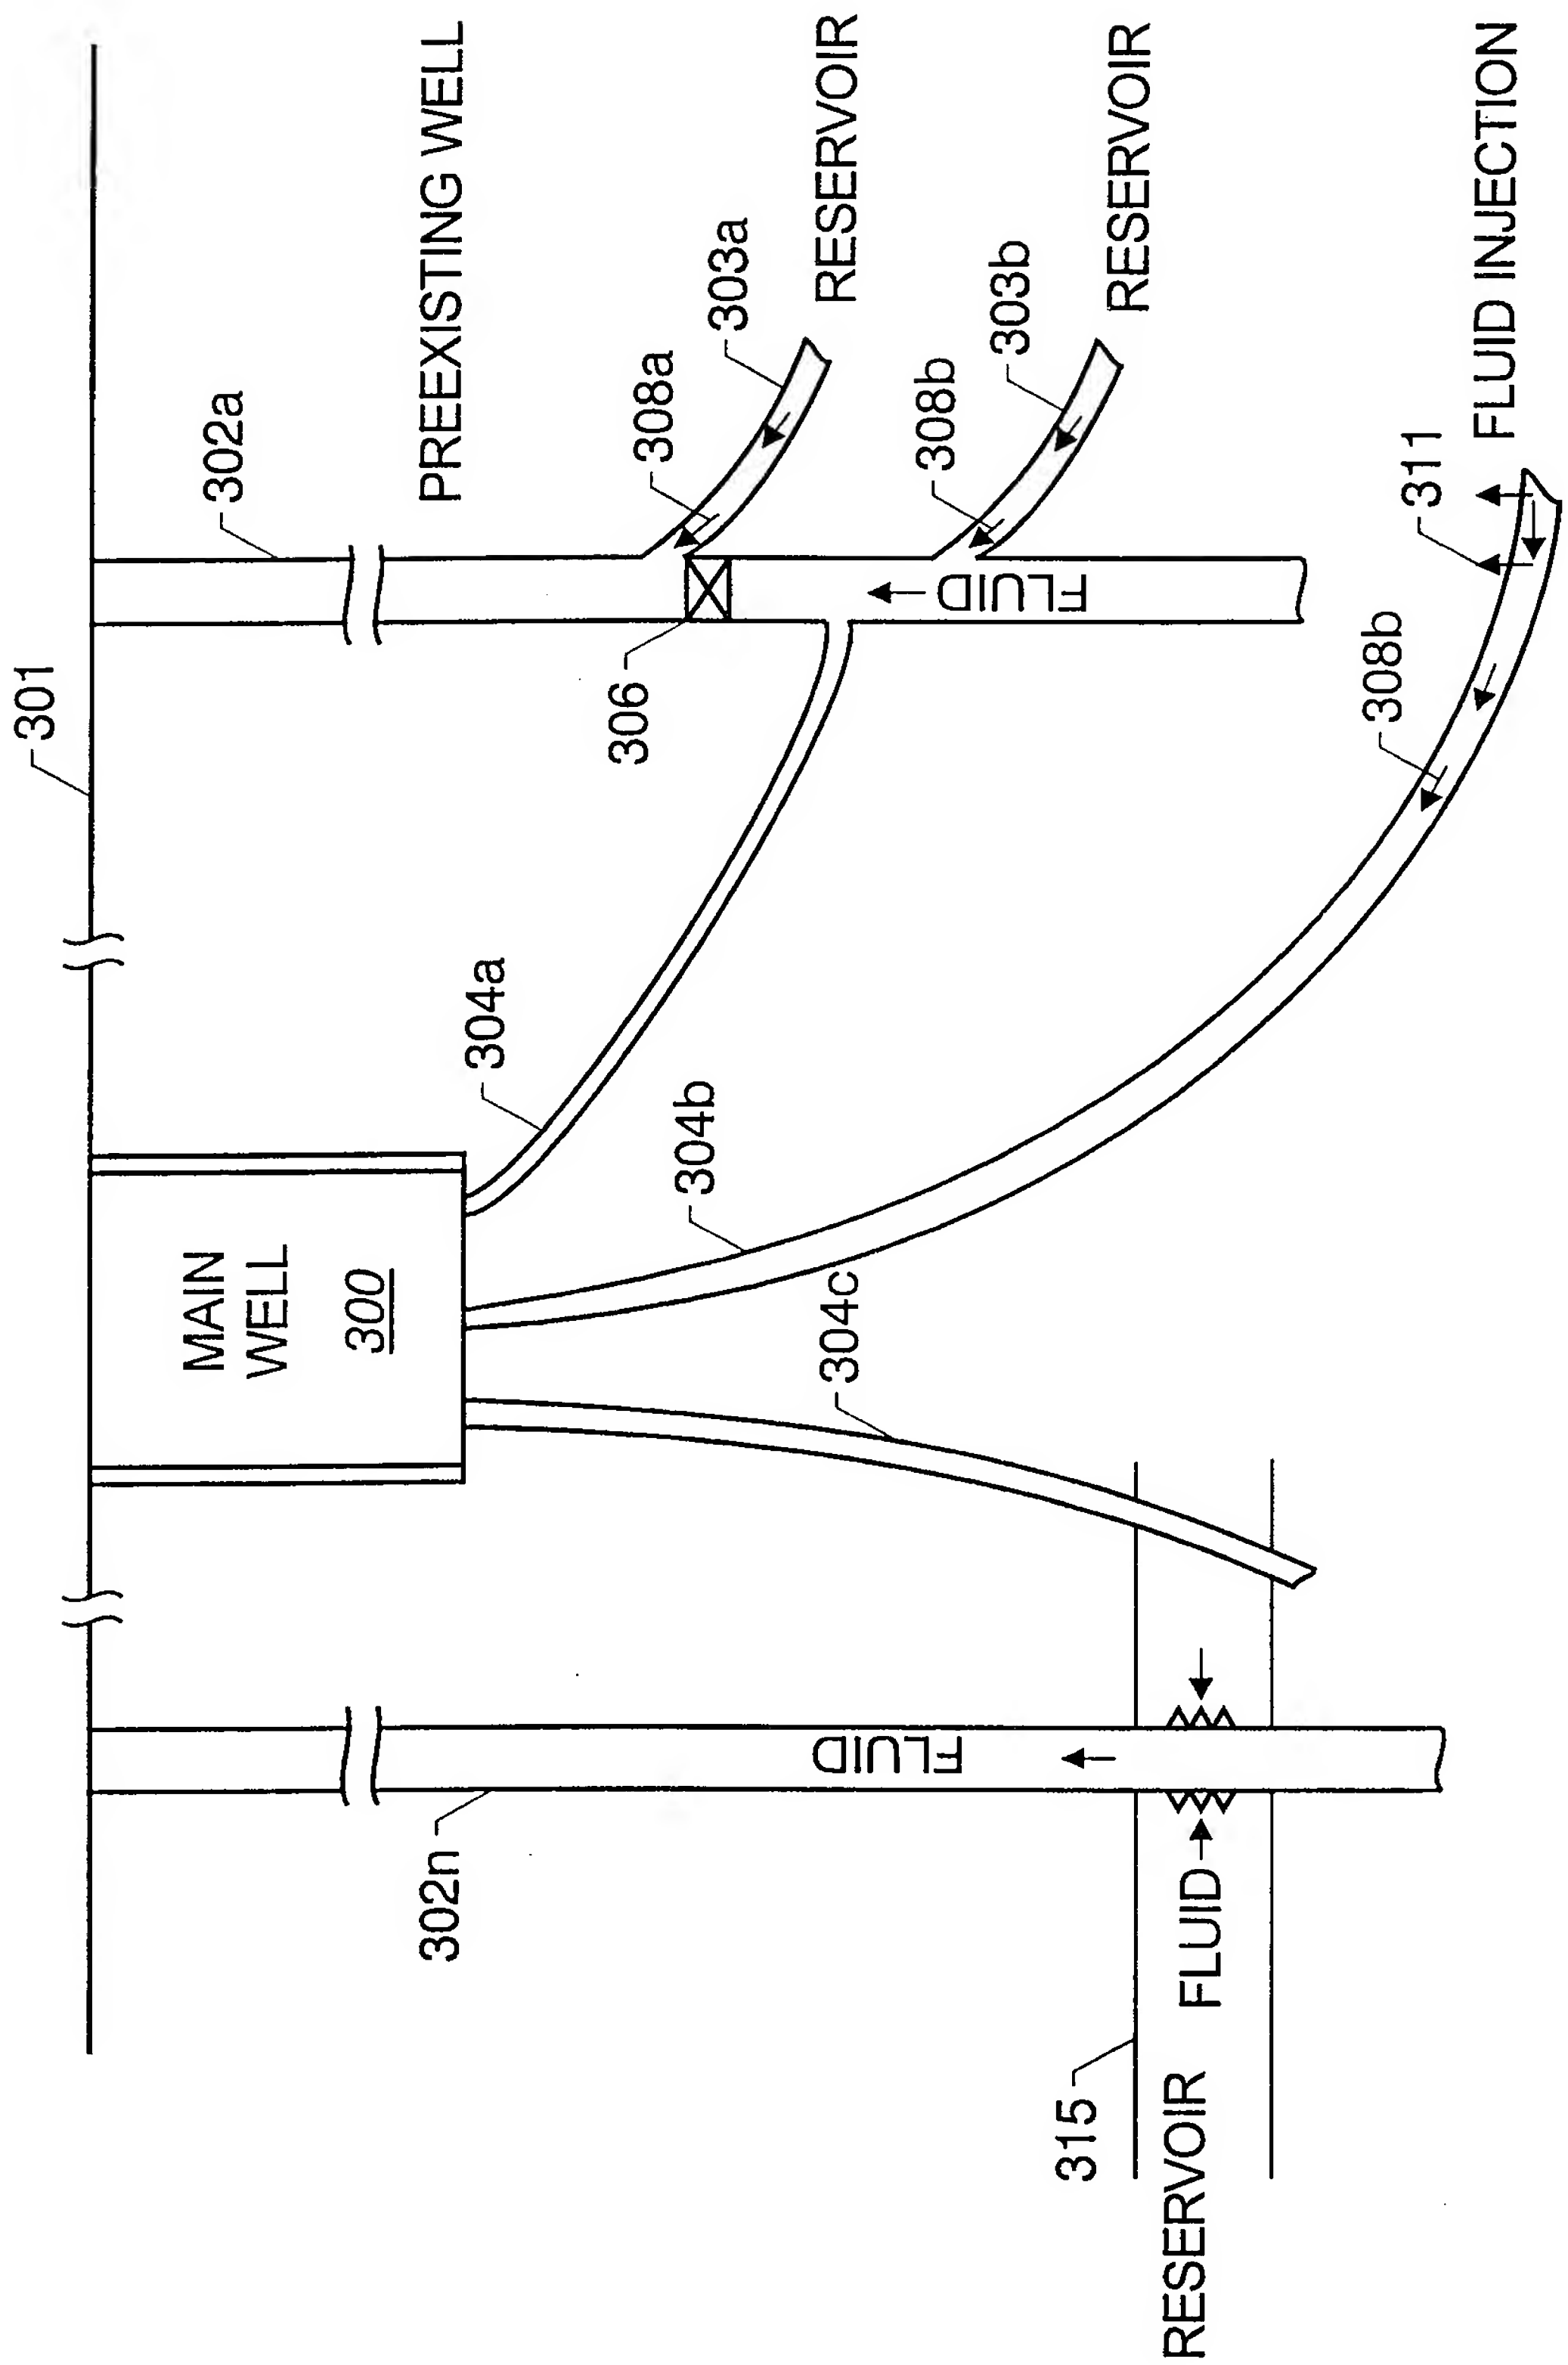


Figure 5

Manifolding Clusters

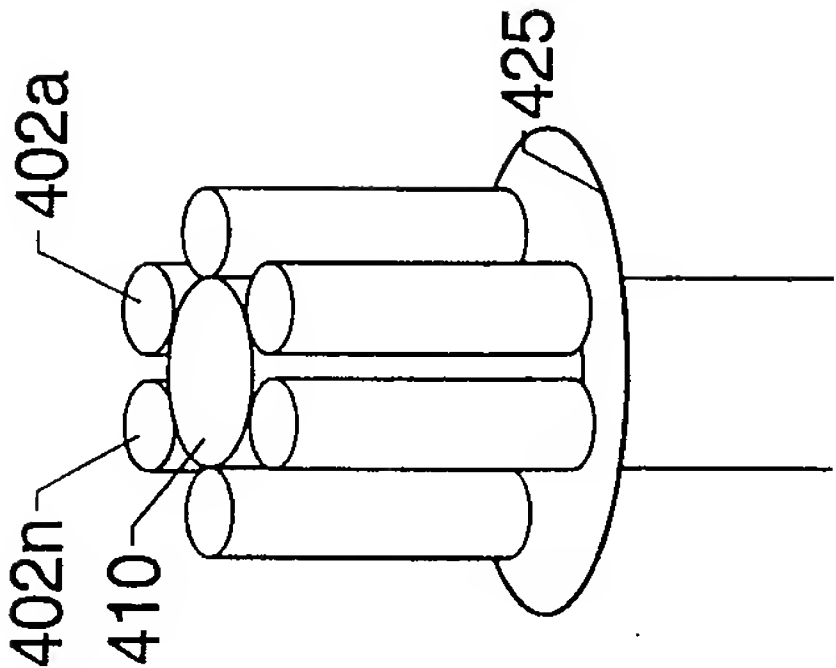


Figure 6C

Internal Cluster

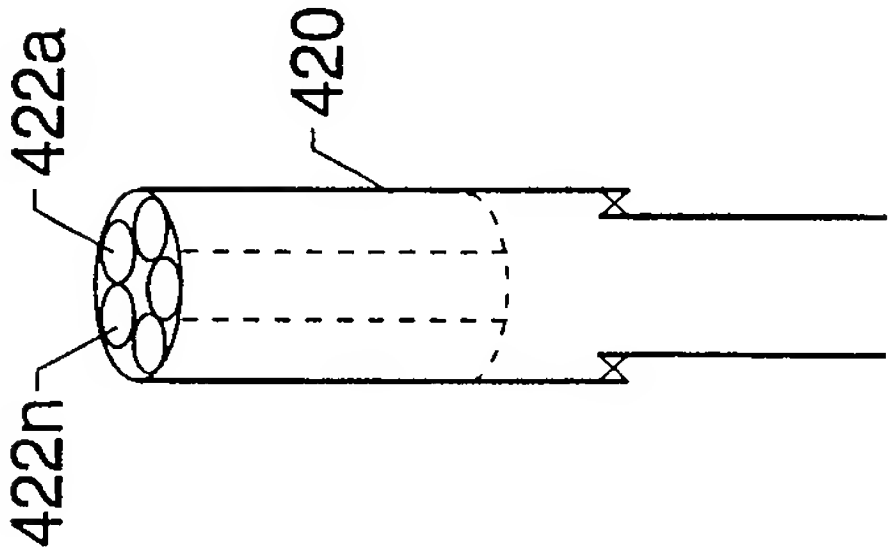


Figure 6B

External Cluster

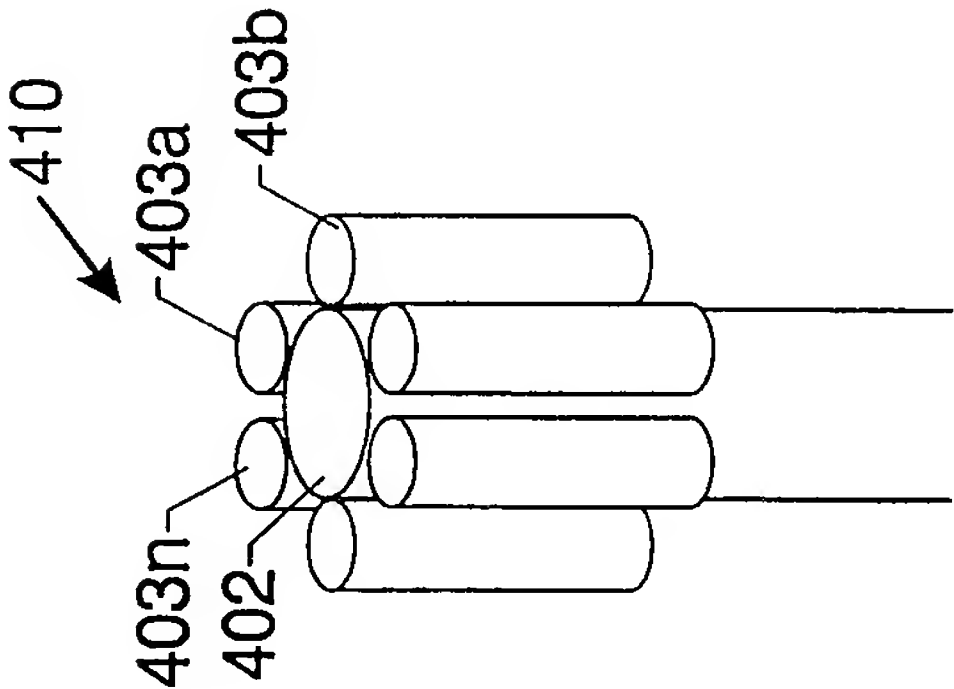


Figure 6A

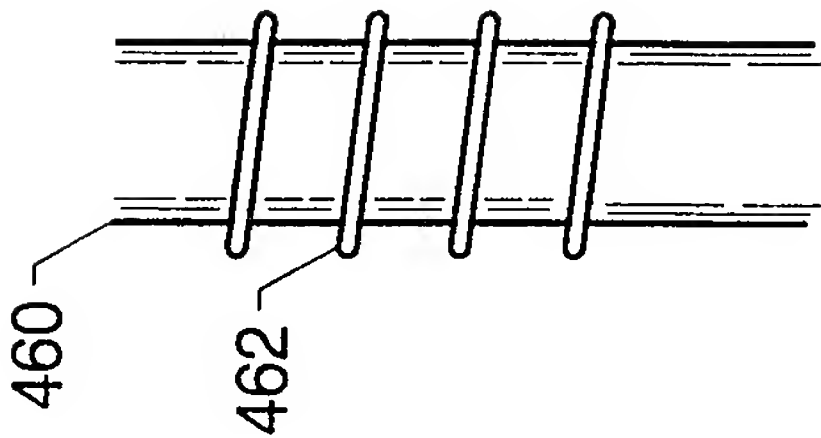


Figure 7B

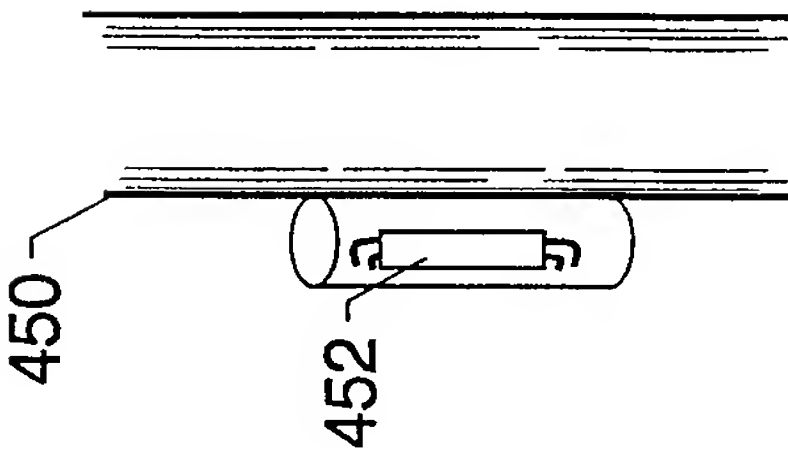


Figure 7A